

# Multi Degrees of Freedom Systems

## MDOF's

Giacomo Boffi

Dipartimento di Ingegneria Strutturale, Politecnico di Milano

April 20, 2011

## Outline

### Introductory Remarks

An Example

The Equation of Motion, a System of Linear Differential Equations

Matrices are Linear Operators

Properties of Structural Matrices

An example

### The Homogeneous Problem

The Homogeneous Equation of Motion

Eigenvalues and Eigenvectors

Eigenvectors are Orthogonal

### Modal Analysis

Eigenvectors are a base

EoM in Modal Coordinates

Initial Conditions

### Examples

2 DOF System

# Introductory Remarks

Generalized SDOF's

Giacomo Boffi

Introductory Remarks

An Example


The Equation of Motion  
Matrices are Linear Operators  
Properties of Structural Matrices  
An example

The Homogeneous Problem


Modal Analysis

Examples

Consider an undamped system with two masses and two degrees of freedom.

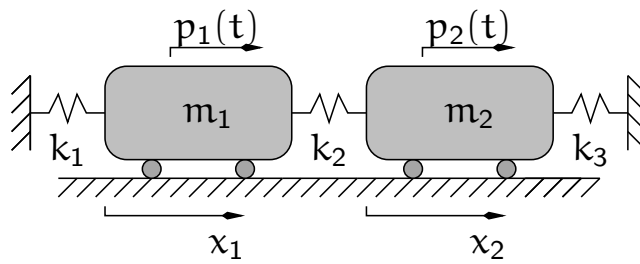

We can separate the two masses, single out the spring forces and, using the D'Alembert Principle, the inertial forces and, finally, write an equation of dynamic equilibrium for each mass.

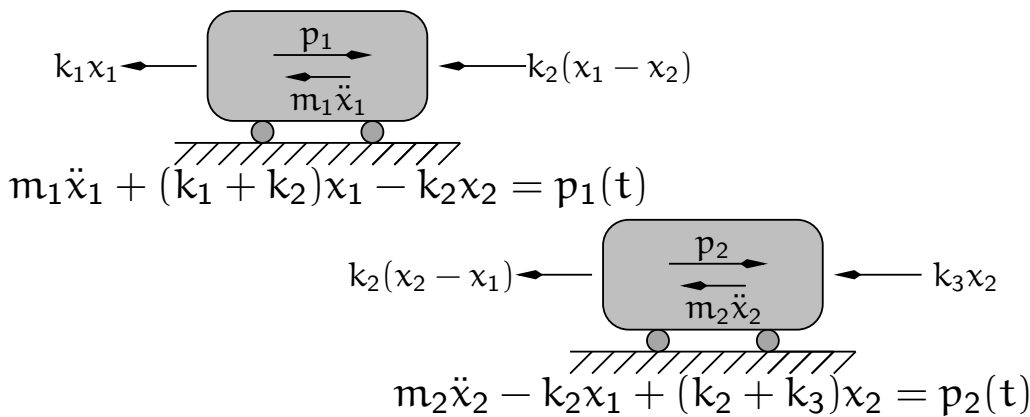

# The equation of motion of a 2DOF system

Generalized SDOF's

Giacomo Boffi

Introductory Remarks

An Example

The Equation of Motion

Matrices are Linear Operators  
Properties of Structural Matrices  
An example

The Homogeneous Problem

Modal Analysis

Examples

With some little rearrangement we have a system of two linear differential equations in two variables,  $x_1(t)$  and  $x_2(t)$ :

$$\begin{cases} m_1 \ddot{x}_1 + (k_1 + k_2)x_1 - k_2 x_2 = p_1(t), \\ m_2 \ddot{x}_2 - k_2 x_1 + (k_2 + k_3)x_2 = p_2(t). \end{cases}$$

## The equation of motion of a 2DOF system

Generalized  
SDOF's

Giacomo Boffi

Introductory  
Remarks

An Example

The Equation of  
Motion

Matrices are  
Linear Operators

Properties of  
Structural  
Matrices

An example

The  
Homogeneous  
Problem

Modal Analysis

Examples

Introducing the loading vector  $\mathbf{p}$ , the vector of inertial forces  $\mathbf{f}_I$  and the vector of elastic forces  $\mathbf{f}_S$ ,

$$\mathbf{p} = \begin{Bmatrix} p_1(t) \\ p_2(t) \end{Bmatrix}, \quad \mathbf{f}_I = \begin{Bmatrix} f_{I,1} \\ f_{I,2} \end{Bmatrix}, \quad \mathbf{f}_S = \begin{Bmatrix} f_{S,1} \\ f_{S,2} \end{Bmatrix}$$

we can write a vectorial equation of equilibrium:

$$\mathbf{f}_I + \mathbf{f}_S = \mathbf{p}(t).$$

## $\mathbf{f}_S = \mathbf{K} \boldsymbol{\chi}$

Generalized  
SDOF's

Giacomo Boffi

Introductory  
Remarks

An Example

The Equation of  
Motion

Matrices are  
Linear Operators

Properties of  
Structural  
Matrices

An example

The  
Homogeneous  
Problem

Modal Analysis

Examples

It is possible to write the linear relationship between  $\mathbf{f}_S$  and the vector of displacements  $\boldsymbol{\chi} = \{\chi_1 \chi_2\}^T$  in terms of a matrix product.

In our example it is

$$\mathbf{f}_S = \begin{bmatrix} k_1 + k_2 & -k_2 \\ -k_2 & k_2 + k_3 \end{bmatrix} \boldsymbol{\chi} = \mathbf{K} \boldsymbol{\chi}$$

introducing the stiffness matrix  $\mathbf{K}$ .

The stiffness matrix  $\mathbf{K}$  has a number of rows equal to the number of elastic forces, i.e., one force for each *DOF* and a number of columns equal to the number of the *DOF*.

The stiffness matrix  $\mathbf{K}$  is hence a *square matrix*  $\mathbf{K}_{\text{ndof} \times \text{ndof}}$

$$\mathbf{f}_I = \mathbf{M} \ddot{\mathbf{x}}$$

Generalized SDOF's

Giacomo Boffi

Introductory Remarks

An Example  
The Equation of Motion

Matrices are Linear Operators

Properties of Structural Matrices

An example

The Homogeneous Problem

Modal Analysis

Examples

Analogously, introducing the mass matrix  $\mathbf{M}$  that, for our example, is

$$\mathbf{M} = \begin{bmatrix} m_1 & 0 \\ 0 & m_2 \end{bmatrix}$$

we can write

$$\mathbf{f}_I = \mathbf{M} \ddot{\mathbf{x}}.$$

Also the mass matrix  $\mathbf{M}$  is a square matrix, with number of rows and columns equal to the number of *DOF*'s.

## Matrix Equation

Generalized SDOF's

Giacomo Boffi

Introductory Remarks

An Example  
The Equation of Motion

Matrices are Linear Operators

Properties of Structural Matrices

An example

The Homogeneous Problem

Modal Analysis

Examples

Finally it is possible to write the equation of motion in matrix format:

$$\mathbf{M} \ddot{\mathbf{x}} + \mathbf{K} \mathbf{x} = \mathbf{p}(t).$$

Of course, we can consider the damping forces too, taking into account the velocity vector  $\dot{\mathbf{x}}$ , introducing a *damping matrix*  $\mathbf{C}$  and writing

$$\mathbf{M} \ddot{\mathbf{x}} + \mathbf{C} \dot{\mathbf{x}} + \mathbf{K} \mathbf{x} = \mathbf{p}(t),$$

however it is now more productive to keep our attention on undamped systems.

## Properties of $\mathbf{K}$

- ▶  $\mathbf{K}$  is symmetrical, because the elastic force that acts on mass  $i$  due to a unit displacement of mass  $j$ ,  $f_{S,i} = k_{ij}$  is equal to the force on mass  $j$  due to unit displacement of mass  $i$ ,  $f_{S,j} = k_{ji}$ .
- ▶ The strain energy  $V$  for a discrete system can be written

$$V = \frac{1}{2} \mathbf{x}^T \mathbf{f}_S = \frac{1}{2} \mathbf{x}^T \mathbf{K} \mathbf{x},$$

because the strain energy is positive it follows that  $\mathbf{K}$  is a positive definite matrix.

Generalized  
SDOF's

Giacomo Boffi

Introductory  
Remarks

An Example  
The Equation of  
Motion

Matrices are  
Linear Operators

Properties of  
Structural  
Matrices

An example

The  
Homogeneous  
Problem

Modal Analysis

Examples

## Properties of $\mathbf{M}$

Restricting our discussion to systems whose degrees of freedom are the displacements of a set of discrete masses, we have that the mass matrix is a diagonal matrix, with all its diagonal elements greater than zero. Such a matrix is symmetrical and definite positive, as well as the stiffness matrix is symmetrical and definite positive.

En passant, take note that the kinetic energy for a discrete system is

$$T = \frac{1}{2} \dot{\mathbf{x}}^T \mathbf{M} \dot{\mathbf{x}}.$$

Generalized  
SDOF's

Giacomo Boffi

Introductory  
Remarks

An Example  
The Equation of  
Motion

Matrices are  
Linear Operators

Properties of  
Structural  
Matrices

An example

The  
Homogeneous  
Problem

Modal Analysis

Examples

# Generalisation of previous results

Generalized SDOF's

Giacomo Boffi

Introductory Remarks

An Example  
The Equation of Motion

Matrices are Linear Operators

Properties of Structural Matrices

An example

The Homogeneous Problem

Modal Analysis

Examples

The findings in the previous two slides can be generalised to the *structural matrices* of generic structural systems, with one exception.

For a general structural system,  $\mathbf{M}$  could be *semi-definite* positive, that is for some particular displacement vector the kinetic energy could be zero.

# The problem

Generalized SDOF's

Giacomo Boffi

Introductory Remarks

An Example  
The Equation of Motion

Matrices are Linear Operators  
Properties of Structural Matrices


An example

The Homogeneous Problem

Modal Analysis

Examples

Graphical statement of the problem

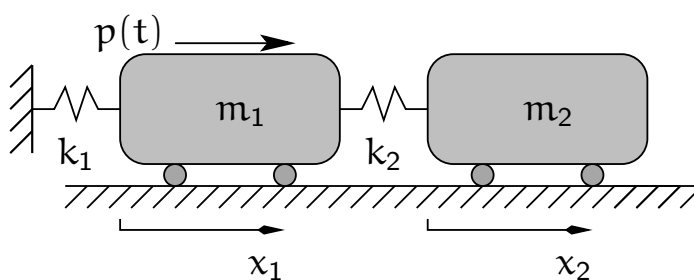

$$k_1 = 2k, \quad k_2 = k; \quad m_1 = 2m, \quad m_2 = m;$$

$$p(t) = p_0 \sin \omega t.$$

The equations of motion

$$m_1 \ddot{x}_1 + k_1 x_1 + k_2 (x_1 - x_2) = p_0 \sin \omega t,$$

$$m_2 \ddot{x}_2 + k_2 (x_2 - x_1) = 0.$$

... but we prefer the matrix notation ...

## The steady state solution

Generalized  
SDOF's

Giacomo Boffi

Introductory  
Remarks

**An Example**  
**The Equation of**  
**Motion**  
**Matrices are**  
**Linear Operators**  
**Properties of**  
**Structural**  
**Matrices**

An example

The  
Homogeneous  
Problem

Modal Analysis

Examples

because using the matrix notation we can follow the same steps we used to find the steady-state response of a *SDOF* system.

First, the equation of motion

$$m \begin{bmatrix} 2 & 0 \\ 0 & 1 \end{bmatrix} \ddot{\mathbf{x}} + k \begin{bmatrix} 3 & -1 \\ -1 & 1 \end{bmatrix} \mathbf{x} = p_0 \begin{Bmatrix} 1 \\ 0 \end{Bmatrix} \sin \omega t$$

substituting  $\mathbf{x}(t) = \boldsymbol{\xi} \sin \omega t$  and simplifying  $\sin \omega t$ , dividing by  $k$ , with  $\omega_0^2 = k/m$ ,  $\beta^2 = \omega^2/\omega_0^2$  and  $\Delta_{st} = p_0/k$  the above equation can be written

$$\left( \begin{bmatrix} 3 & -1 \\ -1 & 1 \end{bmatrix} - \beta^2 \begin{bmatrix} 2 & 0 \\ 0 & 1 \end{bmatrix} \right) \boldsymbol{\xi} = \begin{bmatrix} 3 - 2\beta^2 & -1 \\ -1 & 1 - \beta^2 \end{bmatrix} \boldsymbol{\xi} = \Delta_{st} \begin{Bmatrix} 1 \\ 0 \end{Bmatrix}$$

solving for  $\boldsymbol{\xi}/\Delta_{st}$  gives

$$\frac{\boldsymbol{\xi}}{\Delta_{st}} = \frac{\begin{bmatrix} 1 - \beta^2 & 1 \\ 1 & 3 - 2\beta^2 \end{bmatrix} \begin{Bmatrix} 1 \\ 0 \end{Bmatrix}}{(\beta^2 - \frac{1}{2})(\beta^2 - 2)} = \frac{\begin{Bmatrix} 1 - \beta^2 \\ 1 \end{Bmatrix}}{(\beta^2 - \frac{1}{2})(\beta^2 - 2)}$$

## The solution, graphically

Generalized  
SDOF's

Giacomo Boffi

Introductory  
Remarks

**An Example**  
**The Equation of**  
**Motion**  
**Matrices are**  
**Linear Operators**  
**Properties of**  
**Structural**  
**Matrices**


An example

The  
Homogeneous  
Problem

Modal Analysis

Examples

steady-state response for a 2 dof system, harmonic load

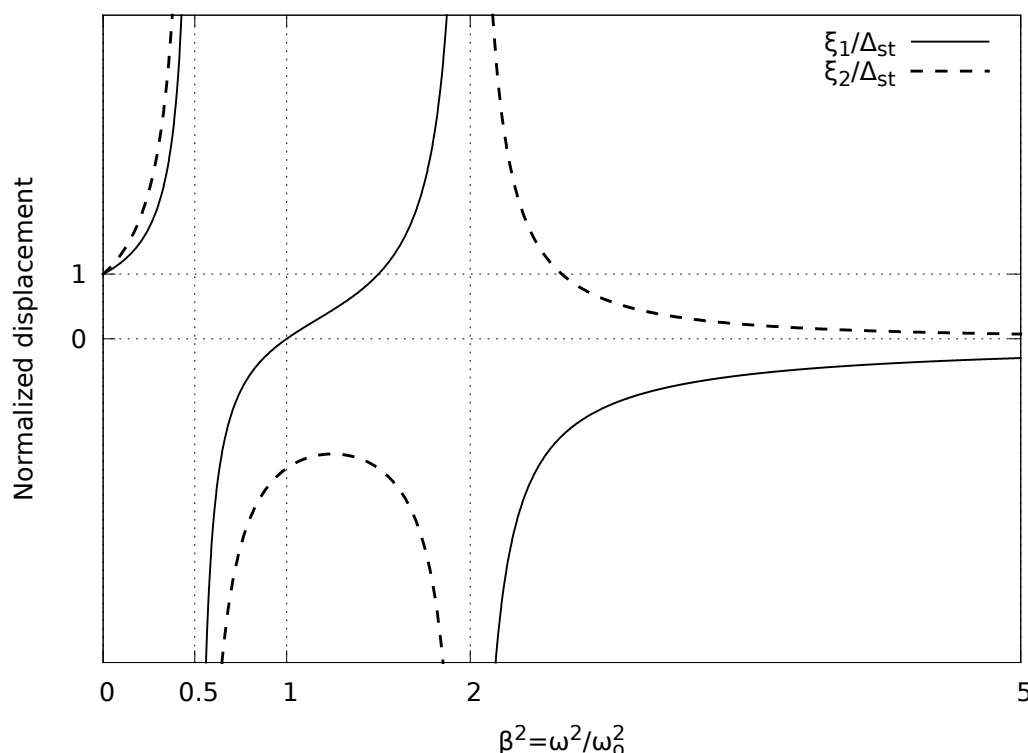

## Homogeneous equation of motion

Generalized  
SDOF's

Giacomo Boffi

Introductory  
Remarks

The  
Homogeneous  
Problem

**The  
Homogeneous  
Equation of  
Motion**

**Eigenvalues and  
Eigenvectors  
Eigenvectors are  
Orthogonal**

Modal Analysis

Examples

To understand the behaviour of a *MDOF* system, we start writing the homogeneous equation of motion,

$$\mathbf{M}\ddot{\mathbf{x}} + \mathbf{K}\mathbf{x} = 0.$$

The solution, in analogy with the *SDOF* case, can be written in terms of a harmonic function of unknown frequency and, using the concept of separation of variables, of a constant vector, the so called *shape vector*  $\boldsymbol{\psi}$ :

$$\mathbf{x}(t) = \boldsymbol{\psi}(A \sin \omega t + B \cos \omega t).$$

Substituting in the equation of motion, we have

$$(\mathbf{K} - \omega^2 \mathbf{M}) \boldsymbol{\psi}(A \sin \omega t + B \cos \omega t) = 0$$

## Eigenvalues

Generalized  
SDOF's

Giacomo Boffi

Introductory  
Remarks

The  
Homogeneous  
Problem

**The  
Homogeneous  
Equation of  
Motion**

**Eigenvalues and  
Eigenvectors  
Eigenvectors are  
Orthogonal**

Modal Analysis

Examples

The previous equation must hold for every value of  $t$ , so it can be simplified removing the time dependency:

$$(\mathbf{K} - \omega^2 \mathbf{M}) \boldsymbol{\psi} = 0.$$

This is a homogeneous linear equation, with unknowns  $\psi_i$  and the coefficients that depends on the parameter  $\omega^2$ .

Speaking of homogeneous systems, we know that there is always a trivial solution,  $\boldsymbol{\psi} = 0$ , and that different non-zero solutions are available when the determinant of the matrix of coefficients is equal to zero,

$$\det(\mathbf{K} - \omega^2 \mathbf{M}) = 0$$

The *eigenvalues* of the *MDOF* system are the values of  $\omega^2$  for which the above equation (the *equation of frequencies*) is verified.



## Eigenvectors

Generalized  
SDOF's

Giacomo Boffi

Introductory  
Remarks

The  
Homogeneous  
Problem

The  
Homogeneous  
Equation of  
Motion

Eigenvalues and  
Eigenvectors

Eigenvectors are  
Orthogonal

Modal Analysis

Examples

For a system with  $N$  degrees of freedom the expansion of  $\det(\mathbf{K} - \omega^2 \mathbf{M})$  is an algebraic polynomial of degree  $N$  in  $\omega^2$ , whose roots,  $\omega_i^2$ ,  $i = 1, \dots, N$  are all real and greater than zero if both  $\mathbf{K}$  and  $\mathbf{M}$  are positive definite matrices, condition that is always satisfied by stable structural systems. Substituting one of the  $N$  roots  $\omega_i^2$  in the characteristic equation,

$$(\mathbf{K} - \omega_i^2 \mathbf{M}) \boldsymbol{\psi}_i = 0$$

the resulting system of  $N - 1$  linearly independent equations can be solved (except for a scale factor) for  $\boldsymbol{\psi}_i$ , the eigenvector corresponding to the eigenvalue  $\omega_i^2$ .

A common choice for the normalisation of the eigenvectors is *normalisation with respect to the mass matrix*,  $\boldsymbol{\psi}_i^T \mathbf{M} \boldsymbol{\psi}_i = 1$

## Initial Conditions

Generalized  
SDOF's

Giacomo Boffi

Introductory  
Remarks

The  
Homogeneous  
Problem

The  
Homogeneous  
Equation of  
Motion

Eigenvalues and  
Eigenvectors

Eigenvectors are  
Orthogonal

Modal Analysis

Examples

The most general expression (*the general integral*) for the displacement of a homogeneous system is

$$\mathbf{x}(t) = \sum_{i=1}^N \boldsymbol{\psi}_i (A_i \sin \omega_i t + B_i \cos \omega_i t).$$

In the general integral there are  $2N$  unknown *constants of integration*, that must be determined in terms of the initial conditions.

## Initial Conditions

Generalized SDOF's

Giacomo Boffi

Introductory Remarks

The Homogeneous Problem

The Homogeneous Equation of Motion

Eigenvalues and Eigenvectors

Eigenvectors are Orthogonal

Modal Analysis

Examples

Usually the initial conditions are expressed in terms of initial displacements and initial velocities  $\mathbf{x}_0$  and  $\dot{\mathbf{x}}_0$ , so we start deriving the expression of displacement with respect to time to obtain

$$\dot{\mathbf{x}}(t) = \sum_{i=1}^N \boldsymbol{\psi}_i \omega_i (A_i \cos \omega_i t - B_i \sin \omega_i t)$$

and evaluating the displacement and velocity for  $t = 0$  it is

$$\mathbf{x}(0) = \sum_{i=1}^N \boldsymbol{\psi}_i B_i = \mathbf{x}_0, \quad \dot{\mathbf{x}}(0) = \sum_{i=1}^N \boldsymbol{\psi}_i \omega_i A_i = \dot{\mathbf{x}}_0.$$

The above equations are vector equations, each one corresponding to a system of  $N$  equations, so we can compute the  $2N$  constants of integration solving the  $2N$  equations

$$\sum_{i=1}^N \psi_{ji} B_i = x_{0,j}, \quad \sum_{i=1}^N \psi_{ji} \omega_i A_i = \dot{x}_{0,j}, \quad j = 1, \dots, N.$$

## Orthogonality - 1

Generalized SDOF's

Giacomo Boffi

Introductory Remarks

The Homogeneous Problem

The Homogeneous Equation of Motion

Eigenvalues and Eigenvectors

Eigenvectors are Orthogonal

Modal Analysis

Examples

Take into consideration two distinct eigenvalues,  $\omega_r^2$  and  $\omega_s^2$ , and write the characteristic equation for each eigenvalue:

$$\mathbf{K} \boldsymbol{\psi}_r = \omega_r^2 \mathbf{M} \boldsymbol{\psi}_r$$

$$\mathbf{K} \boldsymbol{\psi}_s = \omega_s^2 \mathbf{M} \boldsymbol{\psi}_s$$

premultiply each equation member by the transpose of the *other* eigenvector

$$\boldsymbol{\psi}_s^T \mathbf{K} \boldsymbol{\psi}_r = \omega_r^2 \boldsymbol{\psi}_s^T \mathbf{M} \boldsymbol{\psi}_r$$

$$\boldsymbol{\psi}_r^T \mathbf{K} \boldsymbol{\psi}_s = \omega_s^2 \boldsymbol{\psi}_r^T \mathbf{M} \boldsymbol{\psi}_s$$

## Orthogonality - 2

Generalized  
SDOF's

Giacomo Boffi

Introductory  
Remarks

The  
Homogeneous  
Problem

The  
Homogeneous  
Equation of  
Motion

Eigenvalues and  
Eigenvectors

Eigenvectors are  
Orthogonal

Modal Analysis

Examples

The term  $\psi_s^T \mathbf{K} \psi_r$  is a scalar, hence

$$\psi_s^T \mathbf{K} \psi_r = (\psi_s^T \mathbf{K} \psi_r)^T = \psi_r^T \mathbf{K}^T \psi_s$$

but  $\mathbf{K}$  is symmetrical,  $\mathbf{K}^T = \mathbf{K}$  and we have

$$\psi_s^T \mathbf{K} \psi_r = \psi_r^T \mathbf{K} \psi_s.$$

By a similar derivation

$$\psi_s^T \mathbf{M} \psi_r = \psi_r^T \mathbf{M} \psi_s.$$

## Orthogonality - 3

Generalized  
SDOF's

Giacomo Boffi

Introductory  
Remarks

The  
Homogeneous  
Problem

The  
Homogeneous  
Equation of  
Motion

Eigenvalues and  
Eigenvectors

Eigenvectors are  
Orthogonal

Modal Analysis

Examples

Substituting our last identities in the previous equations, we have

$$\psi_r^T \mathbf{K} \psi_s = \omega_r^2 \psi_r^T \mathbf{M} \psi_s$$

$$\psi_r^T \mathbf{K} \psi_s = \omega_s^2 \psi_r^T \mathbf{M} \psi_s$$

subtracting member by member we find that

$$(\omega_r^2 - \omega_s^2) \psi_r^T \mathbf{M} \psi_s = 0$$

We started with the hypothesis that  $\omega_r^2 \neq \omega_s^2$ , so for every  $r \neq s$  we have that the corresponding eigenvectors are *orthogonal with respect to the mass matrix*

$$\psi_r^T \mathbf{M} \psi_s = 0, \quad \text{for } r \neq s.$$

## Orthogonality - 4

Generalized  
SDOF's

Giacomo Boffi

Introductory  
Remarks

The  
Homogeneous  
Problem

The  
Homogeneous  
Equation of  
Motion

Eigenvalues and  
Eigenvectors

**Eigenvectors are  
Orthogonal**

Modal Analysis

Examples

The eigenvectors are orthogonal also with respect to the stiffness matrix:

$$\boldsymbol{\psi}_s^T \mathbf{K} \boldsymbol{\psi}_r = \omega_r^2 \boldsymbol{\psi}_s^T \mathbf{M} \boldsymbol{\psi}_r = 0, \quad \text{for } r \neq s.$$

By definition

$$M_i = \boldsymbol{\psi}_i^T \mathbf{M} \boldsymbol{\psi}_i$$

and

$$\boldsymbol{\psi}_i^T \mathbf{K} \boldsymbol{\psi}_i = \omega_i^2 M_i.$$

## Eigenvectors are a base

Generalized  
SDOF's

Giacomo Boffi

Introductory  
Remarks

The  
Homogeneous  
Problem

Modal Analysis

**Eigenvectors are a  
base**

EoM in Modal  
Coordinates  
Initial Conditions

Examples

The eigenvectors are linearly independent, so for every vector  $\mathbf{x}$  we can write

$$\mathbf{x} = \sum_{j=1}^N \boldsymbol{\psi}_j q_j.$$

The coefficients are readily given by premultiplication of  $\mathbf{x}$  by  $\boldsymbol{\psi}_i^T \mathbf{M}$ , because

$$\boldsymbol{\psi}_i^T \mathbf{M} \mathbf{x} = \sum_{j=1}^N \boldsymbol{\psi}_i^T \mathbf{M} \boldsymbol{\psi}_j q_j = \boldsymbol{\psi}_i^T \mathbf{M} \boldsymbol{\psi}_i q_i = M_i q_i$$

in virtue of the orthogonality of the eigenvectors with respect to the mass matrix, and the above relationship gives

$$q_j = \frac{\boldsymbol{\psi}_j^T \mathbf{M} \mathbf{x}}{M_j}.$$

## Eigenvectors are a base

Generalized SDOF's

Giacomo Boffi

Introductory Remarks

The Homogeneous Problem

Modal Analysis

**Eigenvectors are a base**

**EoM in Modal Coordinates**

**Initial Conditions**

Examples

Generalising our results for the displacement vector to the acceleration vector, we can write

$$\begin{aligned}\mathbf{x}(t) &= \sum_{j=1}^N \boldsymbol{\psi}_j q_j(t), & \ddot{\mathbf{x}}(t) &= \sum_{j=1}^N \boldsymbol{\psi}_j \ddot{q}_j(t), \\ x_i(t) &= \sum_{j=1}^N \Psi_{ij} q_j(t), & \ddot{x}_i(t) &= \sum_{j=1}^N \psi_{ij} \ddot{q}_j(t).\end{aligned}$$

Introducing  $\mathbf{q}(t)$ , the vector of *modal coordinates* and  $\boldsymbol{\Psi}$ , the *eigenvector matrix*, whose columns are the eigenvectors,

$$\mathbf{x}(t) = \boldsymbol{\Psi} \mathbf{q}(t), \quad \ddot{\mathbf{x}}(t) = \boldsymbol{\Psi} \ddot{\mathbf{q}}(t).$$

## EoM in Modal Coordinates...

Generalized SDOF's

Giacomo Boffi

Introductory Remarks

The Homogeneous Problem

Modal Analysis

**Eigenvectors are a base**

**EoM in Modal Coordinates**

**Initial Conditions**

Examples

Substituting the last two equations in the equation of motion,

$$\mathbf{M} \boldsymbol{\Psi} \ddot{\mathbf{q}} + \mathbf{K} \boldsymbol{\Psi} \mathbf{q} = \mathbf{p}(t)$$

premultiplying by  $\boldsymbol{\Psi}^T$

$$\boldsymbol{\Psi}^T \mathbf{M} \boldsymbol{\Psi} \ddot{\mathbf{q}} + \boldsymbol{\Psi}^T \mathbf{K} \boldsymbol{\Psi} \mathbf{q} = \boldsymbol{\Psi}^T \mathbf{p}(t)$$

introducing the so called *starred* matrices we can finally write

$$\mathbf{M}^* \ddot{\mathbf{q}} + \mathbf{K}^* \mathbf{q} = \mathbf{p}^*(t)$$

## ... are $N$ independent equations!

Generalized SDOF's

Giacomo Boffi

Introductory Remarks

The Homogeneous Problem

Modal Analysis

Eigenvectors are a base

EoM in Modal Coordinates

Initial Conditions

Examples

We must examine the structure of the starred symbols. The generic element, with indexes  $i$  and  $j$ , of the *starred* matrices can be expressed in terms of single eigenvectors,

$$\begin{aligned}M_{ij}^* &= \boldsymbol{\psi}_i^T \mathbf{M} \boldsymbol{\psi}_j = \delta_{ij} M_i, \\K_{ij}^* &= \boldsymbol{\psi}_i^T \mathbf{K} \boldsymbol{\psi}_j = \omega_i^2 \delta_{ij} M_i.\end{aligned}$$

where  $\delta_{ij}$  is the *Kronecker symbol*,

$$\delta_{ij} = \begin{cases} 1 & i=j \\ 0 & i \neq j \end{cases}$$

Substituting in the equation of motion, with  $p_i^* = \boldsymbol{\psi}_i^T \mathbf{p}(t)$  we have **a set of uncoupled equations**

$$M_i \ddot{q}_i + \omega_i^2 M_i q_i = p_i^*(t), \quad i = 1, \dots, N$$

## Initial Conditions Revisited

Generalized SDOF's

Giacomo Boffi

Introductory Remarks

The Homogeneous Problem

Modal Analysis

Eigenvectors are a base

EoM in Modal Coordinates

Initial Conditions

Examples

The initial displacements can be written in modal coordinates,

$$\mathbf{x}_0 = \boldsymbol{\Psi} \mathbf{q}_0$$

and premultiplying both members by  $\boldsymbol{\Psi}^T \mathbf{M}$  we have the following relationship:

$$\boldsymbol{\Psi}^T \mathbf{M} \mathbf{x}_0 = \boldsymbol{\Psi}^T \mathbf{M} \boldsymbol{\Psi} \mathbf{q}_0 = \mathbf{M}^* \mathbf{q}_0.$$


Premultiplying by the inverse of  $\mathbf{M}^*$  and taking into account that  $\mathbf{M}^*$  is diagonal,

$$\mathbf{q}_0 = (\mathbf{M}^*)^{-1} \boldsymbol{\Psi}^T \mathbf{M} \mathbf{x}_0 \quad \Rightarrow \quad q_{i0} = \frac{\boldsymbol{\psi}_i^T \mathbf{M} \mathbf{x}_0}{M_i}$$

and, analogously,

$$\dot{q}_{i0} = \frac{\boldsymbol{\psi}_i^T \mathbf{M} \dot{\mathbf{x}}_0}{M_i}$$

## 2 DOF System

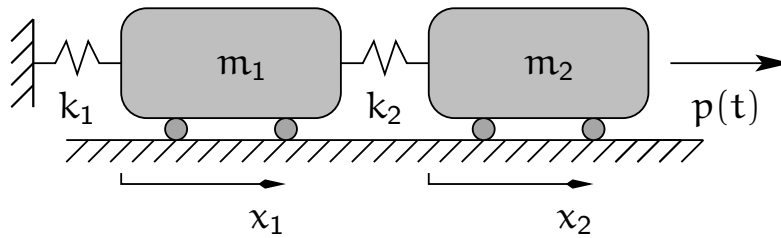

$$k_1 = k, \quad k_2 = 2k; \quad m_1 = 2m, \quad m_2 = m;$$
$$p(t) = p_0 \sin \omega t.$$

$$\mathbf{x} = \begin{Bmatrix} x_1 \\ x_2 \end{Bmatrix}, \quad \mathbf{p}(t) = \begin{Bmatrix} 0 \\ p_0 \end{Bmatrix} \sin \omega t,$$

$$\mathbf{M} = m \begin{bmatrix} 2 & 0 \\ 0 & 1 \end{bmatrix}, \quad \mathbf{K} = k \begin{bmatrix} 3 & -2 \\ -2 & 2 \end{bmatrix}.$$

Generalized  
SDOF's

Giacomo Boffi

Introductory  
Remarks

The  
Homogeneous  
Problem

Modal Analysis

Examples

**2 DOF System**

## Equation of frequencies

Generalized  
SDOF's

Giacomo Boffi

Introductory  
Remarks

The  
Homogeneous  
Problem

Modal Analysis

Examples

**2 DOF System**

The equation of frequencies is

$$\|\mathbf{K} - \omega^2 \mathbf{M}\| = \begin{vmatrix} 3k - 2\omega^2 m & -2k \\ -2k & 2k - \omega^2 m \end{vmatrix} = 0.$$

Developing the determinant

$$(2m^2)\omega^4 - (7mk)\omega^2 + (2k^2)\omega^0 = 0$$

Solving the algebraic equation in  $\omega^2$

$$\omega_1^2 = \frac{k}{m} \frac{7 - \sqrt{33}}{4}$$

$$\omega_2^2 = \frac{k}{m} \frac{7 + \sqrt{33}}{4}$$

$$\omega_1^2 = 0.31386 \frac{k}{m}$$

$$\omega_2^2 = 3.18614 \frac{k}{m}$$

## Eigenvectors

Generalized  
SDOF's

Giacomo Boffi

Introductory  
Remarks

The  
Homogeneous  
Problem

Modal Analysis

Examples

**2 DOF System**

Substituting  $\omega_1^2$  for  $\omega^2$  in the first of the characteristic equations gives the ratio between the components of the first eigenvector,

$$k(3 - 2 \times 0.31386)\psi_{11} - 2k\psi_{21} = 0$$

while substituting  $\omega_2^2$  gives

$$k(3 - 2 \times 3.18614)\psi_{12} - 2k\psi_{22} = 0.$$

Solving with the arbitrary assignment  $\psi_{21} = \psi_{22} = 1$  gives the *unnormalized* eigenvectors,

$$\psi_1 = \begin{Bmatrix} +0.84307 \\ +1.00000 \end{Bmatrix}, \quad \psi_2 = \begin{Bmatrix} -0.59307 \\ +1.00000 \end{Bmatrix}.$$

## Normalization

Generalized  
SDOF's

Giacomo Boffi

Introductory  
Remarks

The  
Homogeneous  
Problem

Modal Analysis

Examples

**2 DOF System**

We compute first  $M_1$  and  $M_2$ ,

$$\begin{aligned} M_1 &= \psi_1^T \mathbf{M} \psi_1 \\ &= \{0.84307, \quad 1\} \begin{bmatrix} 2m & 0 \\ 0 & m \end{bmatrix} \begin{Bmatrix} 0.84307 \\ 1 \end{Bmatrix} \\ &= \{1.68614m, \quad m\} \begin{Bmatrix} 0.84307 \\ 1 \end{Bmatrix} = 2.42153m \end{aligned}$$

$$M_2 = 1.70346m$$

the *adimensional* normalisation factors are

$$\alpha_1 = \sqrt{2.42153}, \quad \alpha_2 = \sqrt{1.70346}.$$

Applying the normalisation factors to the respective unnormalised eigenvectors and collecting them in a matrix, we have the *matrix of normalized eigenvectors*

$$\Psi = \begin{bmatrix} +0.54177 & -0.45440 \\ +0.64262 & +0.76618 \end{bmatrix}$$



## Modal Loadings

Generalized  
SDOF's

Giacomo Boffi

Introductory  
Remarks

The  
Homogeneous  
Problem

Modal Analysis

Examples

**2 DOF System**

The modal loading is

$$\begin{aligned}\mathbf{p}^*(t) &= \mathbf{\Psi}^T \mathbf{p}(t) \\ &= p_0 \begin{bmatrix} +0.54177 & +0.64262 \\ -0.45440 & +0.76618 \end{bmatrix} \begin{Bmatrix} 0 \\ 1 \end{Bmatrix} \sin \omega t \\ &= p_0 \begin{Bmatrix} +0.64262 \\ +0.76618 \end{Bmatrix} \sin \omega t\end{aligned}$$

## Modal EoM

Generalized  
SDOF's

Giacomo Boffi

Introductory  
Remarks

The  
Homogeneous  
Problem

Modal Analysis

Examples

**2 DOF System**

Substituting its modal expansion for  $\mathbf{x}$  into the equation of motion and premultiplying by  $\mathbf{\Psi}^T$  we have the uncoupled modal equation of motion

$$\begin{cases} m\ddot{q}_1 + 0.31386k q_1 = +0.64262 p_0 \sin \omega t \\ m\ddot{q}_2 + 3.18614k q_2 = +0.76618 p_0 \sin \omega t \end{cases}$$

Note that all the terms are dimensionally correct. Dividing by  $m$  both equations, we have

$$\begin{cases} \ddot{q}_1 + \omega_1^2 q_1 = +0.64262 \frac{p_0}{m} \sin \omega t \\ \ddot{q}_2 + \omega_2^2 q_2 = +0.76618 \frac{p_0}{m} \sin \omega t \end{cases}$$

# Particular Integral

Generalized SDOF's

Giacomo Boffi

Introductory Remarks

The Homogeneous Problem

Modal Analysis

Examples

**2 DOF System**

We set

$$\xi_1 = C_1 \sin \omega t, \quad \ddot{\xi} = -\omega^2 C_1 \sin \omega t$$

and substitute in the first modal EoM:

$$C_1 (\omega_1^2 - \omega^2) \sin \omega t = \frac{p_1^*}{m} \sin \omega t$$

solving for  $C_1$

$$C_1 = \frac{p_1^*}{m} \frac{1}{\omega_1^2 - \omega^2}$$

with  $\omega_1^2 = K_1/m \Rightarrow m = K_1/\omega_1^2$ :

$$C_1 = \frac{p_1^*}{K_1} \frac{\omega_1^2}{\omega_1^2 - \omega^2} = \Delta_{st}^{(1)} \frac{1}{1 - \beta_1^2} \quad \text{with } \Delta_{st}^{(1)} = \frac{p_1^*}{K_1} = 2.047 \frac{p_0}{k} \text{ and } \beta_1 = \frac{\omega}{\omega_1}$$

of course

$$C_2 = \Delta_{st}^{(2)} \frac{1}{1 - \beta_2^2} \quad \text{with } \Delta_{st}^{(2)} = \frac{p_2^*}{K_2} = 0.2404 \frac{p_0}{k} \text{ and } \beta_2 = \frac{\omega}{\omega_2}$$

# Integrals

Generalized SDOF's

Giacomo Boffi

Introductory Remarks

The Homogeneous Problem

Modal Analysis

Examples

**2 DOF System**

The integrals, for our loading, are thus

$$\begin{cases} q_1(t) = A_1 \sin \omega_1 t + B_1 \cos \omega_1 t + \Delta_{st}^{(1)} \frac{\sin \omega t}{1 - \beta_1^2} \\ q_2(t) = A_2 \sin \omega_2 t + B_2 \cos \omega_2 t + \Delta_{st}^{(2)} \frac{\sin \omega t}{1 - \beta_2^2} \end{cases}$$

for a system initially at rest

$$\begin{cases} q_1(t) = \Delta_{st}^{(1)} \frac{1}{1 - \beta_1^2} (\sin \omega t - \beta_1 \sin \omega_1 t) \\ q_2(t) = \Delta_{st}^{(2)} \frac{1}{1 - \beta_2^2} (\sin \omega t - \beta_2 \sin \omega_2 t) \end{cases}$$

we are interested in structural degrees of freedom, too... disregarding transient

$$\begin{cases} x_1(t) = \left( \psi_{11} \frac{\Delta_{st}^{(1)}}{1 - \beta_1^2} + \psi_{12} \frac{\Delta_{st}^{(2)}}{1 - \beta_2^2} \right) \sin \omega t = \left( \frac{1.10926}{1 - \beta_1^2} - \frac{0.109271}{1 - \beta_2^2} \right) \frac{p_0}{k} \sin \omega t \\ x_2(t) = \left( \psi_{21} \frac{\Delta_{st}^{(1)}}{1 - \beta_1^2} + \psi_{22} \frac{\Delta_{st}^{(2)}}{1 - \beta_2^2} \right) \sin \omega t = \left( \frac{1.31575}{1 - \beta_1^2} + \frac{0.184245}{1 - \beta_2^2} \right) \frac{p_0}{k} \sin \omega t \end{cases}$$

## The response in modal coordinates

Generalized  
SDOF's

Giacomo Boffi

Introductory  
Remarks

The  
Homogeneous  
Problem

Modal Analysis


Examples

**2 DOF System**

To have a feeling of the response in modal coordinates, let's say that the frequency of the load is  $\omega = 2\omega_0$ .

This implies that  $\beta_1 = \frac{\omega}{\omega_1} = \frac{2.0}{0.31386} = 6.37226$  and

$\beta_2 = \frac{\omega}{\omega_2} = \frac{2.0}{3.18614} = 0.62771$ .

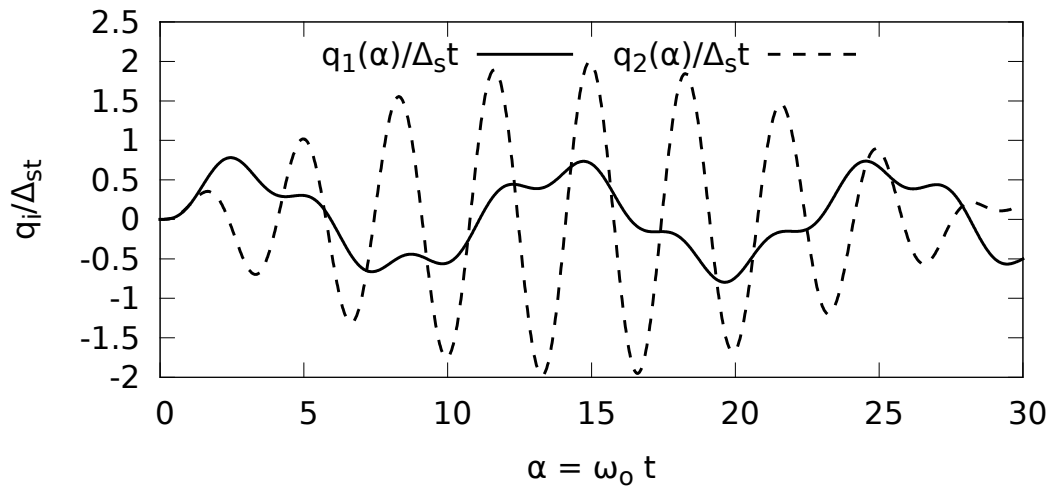

In the graph above, the responses are plotted against an adimensional time coordinate  $\alpha$  with  $\alpha = \omega_0 t$ , while the ordinates are adimensionalised with respect to  $\Delta_{st} = \frac{p_0}{k}$

## The response in structural coordinates

Generalized  
SDOF's

Giacomo Boffi

Introductory  
Remarks

The  
Homogeneous  
Problem

Modal Analysis

Examples

**2 DOF System**

Using the same normalisation factors, here are the response functions in terms of  $x_1 = \psi_{11}q_1 + \psi_{12}q_2$  and

$x_2 = \psi_{21}q_1 + \psi_{22}q_2$ :

