

SDOF linear oscillator  
G. Boffi

Response to Impulsive Loading

Review

Step-by-step Methods

Examples of SbS Methods

# SDOF linear oscillator

## Response to Impulsive Loads & Step by Step Methods

Giacomo Boffi

Dipartimento di Ingegneria Strutturale, Politecnico di Milano

March 9, 2018

SDOF linear oscillator  
G. Boffi

Response to Impulsive Loading

Review

Step-by-step Methods

Examples of SbS Methods

## Outline

- Response to Impulsive Loading
- Review of Numerical Methods
- Step-by-step Methods
- Examples of SbS Methods

SDOF linear oscillator  
G. Boffi

Response to Impulsive Loading

Introduction

Response to Half-Sine Wave Impulse

Response for Rectangular and Triangular Impulses

Shock or response spectra

Approximate Analysis of Response Peak

Review

Step-by-step Methods

Examples of SbS Methods

## Response to Impulsive Loadings

- Response to Impulsive Loading
  - Introduction
  - Response to Half-Sine Wave Impulse
  - Response for Rectangular and Triangular Impulses
  - Shock or response spectra
  - Approximate Analysis of Response Peak
- Review of Numerical Methods
- Step-by-step Methods
- Examples of SbS Methods


## Nature of Impulsive Loadings

SDOF linear oscillator

G. Boffi

An impulsive load is characterized

- ▶ by a single principal impulse, and
- ▶ by a relatively short duration.
- ▶ Impulsive or shock loads are of great importance for the design of certain classes of structural systems, e.g., vehicles or cranes.
- ▶ Damping has much less importance in controlling the maximum response to impulsive loadings because the maximum response is reached in a very short time, before the damping forces can dissipate a significant portion of the energy input into the system.
- ▶ For this reason, in the following we'll consider only the undamped response to impulsive loads.



Response to Impulsive Loading

Introduction

Response to Half-Sine Wave Impulse

Response for Rectangular and Triangular Impulses

Shock or response spectra

Approximate Analysis of Response Peak

Review

Step-by-step Methods

Examples of Sbs Methods

## Definition of Peak Response

SDOF linear oscillator

G. Boffi

When dealing with the response to an impulsive loading of duration  $t_0$  of a SDOF system, with natural period of vibration  $T_n$  we are mostly interested in the *peak response* of the system.

The **peak response** is the maximum of the absolute value of the response ratio,  $R_{max} = \max \{|R(t)|\}$ .

- ▶ If  $t_0 \ll T_n$  necessarily  $R_{max}$  happens after the end of the loading, and its value can be determined studying the free vibrations of the dynamic system.
- ▶ On the other hand, if the excitation lasts *enough* to have at least a local extreme (maximum or minimum) during the excitation we have to consider the more difficult problem of completely determining the response during the application of the impulsive loading.

Response to Impulsive Loading

Introduction

Response to Half-Sine Wave Impulse

Response for Rectangular and Triangular Impulses

Shock or response spectra

Approximate Analysis of Response Peak

Review

Step-by-step Methods

Examples of Sbs Methods


## Half-sine Wave Impulse

SDOF linear oscillator

G. Boffi

The sine-wave impulse has expression

$$p(t) = \begin{cases} p_0 \sin \frac{\pi t}{t_0} = p_0 \sin \omega t & \text{for } 0 < t < t_0, \\ 0 & \text{otherwise.} \end{cases}$$

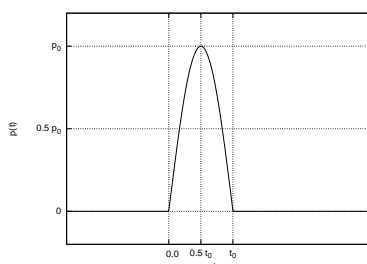

where  $\omega = \frac{2\pi}{2t_0}$  is the frequency associated with the load.

Note that  $\omega t_0 = \pi$ .

Response to Impulsive Loading

Introduction

Response to Half-Sine Wave Impulse

Response for Rectangular and Triangular Impulses

Shock or response spectra

Approximate Analysis of Response Peak

Review

Step-by-step Methods

Examples of Sbs Methods

## Response to sine-wave impulse

SDOF linear oscillator

G. Boffi

Consider an undamped *SDOF* initially at rest, with natural period  $T_n$ , excited by a half-sine impulse of duration  $t_0$ .

The frequency ratio is  $\beta = T_n/2t_0$  and the response ratio in the interval  $0 < t < t_0$  is

$$R(t) = \frac{1}{1 - \beta^2} \left( \sin \omega t - \beta \sin \frac{\omega t}{\beta} \right),$$

$$\dot{R}(t) = \frac{\omega}{1 - \beta^2} \left( \cos \omega t - \cos \frac{\omega t}{\beta} \right). \quad [\text{NB: } \frac{\omega}{\beta} = \omega_n]$$

It is  $(1 - \beta^2)R(t_0) = -\beta \sin \pi/\beta$  and  $(1 - \beta^2)\dot{R}(t_0) = -\omega (1 + \cos \pi/\beta)$ , consequently for  $t_0 \leq t$  the response ratio is

$$R(t) = \frac{-\beta}{1 - \beta^2} \left( \left(1 + \cos \frac{\pi}{\beta}\right) \sin \omega_n(t - t_0) + \sin \frac{\pi}{\beta} \cos \omega_n(t - t_0) \right)$$

Response to Impulsive Loading

Introduction

Response to Half-Sine Wave Impulse

Response for Rectangular and Triangular Impulses

Shock or response spectra

Approximate Analysis of Response Peak

Review

Step-by-step Methods

Examples of Sbs Methods

## Maximum response to sine impulse

SDOF linear oscillator

G. Boffi

We have an extreme, and a possible peak value, for  $0 \leq t \leq t_0$  if

$$\dot{R}(t) = \frac{\omega}{1 - \beta^2} \left( \cos \omega t - \cos \frac{\omega t}{\beta} \right) = 0.$$

That implies that  $\cos \omega t = \cos \omega t/\beta = \cos -\omega t/\beta$ , whose roots are

$$\omega t = \mp \omega t/\beta + 2n\pi, \quad n = 0, \mp 1, \mp 2, \mp 3, \dots$$

It is convenient to substitute  $\omega t = \pi\alpha$ , where  $\alpha = t/t_0$ :

$$\pi\alpha = \pi \left( \mp \frac{\alpha}{\beta} + 2n \right), \quad n = 0, \mp 1, \mp 2, \dots, \quad 0 \leq \alpha \leq 1.$$

Eventually solving for  $\alpha$  one has

$$\alpha = \frac{2n\beta}{\beta \pm 1}, \quad n = 0, \mp 1, \mp 2, \dots, \quad 0 < \alpha < 1.$$

The next slide regards the characteristics of these roots.

Response to Impulsive Loading

Introduction

Response to Half-Sine Wave Impulse

Response for Rectangular and Triangular Impulses

Shock or response spectra

Approximate Analysis of Response Peak

Review


Step-by-step Methods

Examples of Sbs Methods

## $\alpha(\beta, n)$

SDOF linear oscillator

G. Boffi

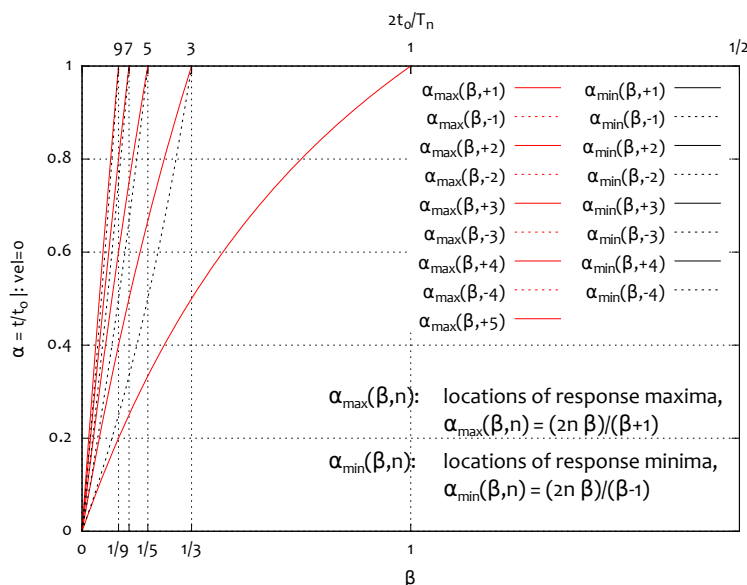

Response to Impulsive Loading

Introduction

Response to Half-Sine Wave Impulse

Response for Rectangular and Triangular Impulses

Shock or response spectra

Approximate Analysis of Response Peak

Review

Step-by-step Methods


Examples of Sbs Methods

# $\alpha(\beta, n)$

SDOF linear oscillator

G. Boffi

In summary, to find the maximum of the response for an assigned  $\beta < 1$ , one has (a) to compute all  $\alpha_k = \frac{2k\beta}{\beta+1}$  until a root is greater than 1, (b) compute all the responses for  $t_k = \alpha_k t_0$ , (c) choose the maximum of the maxima.

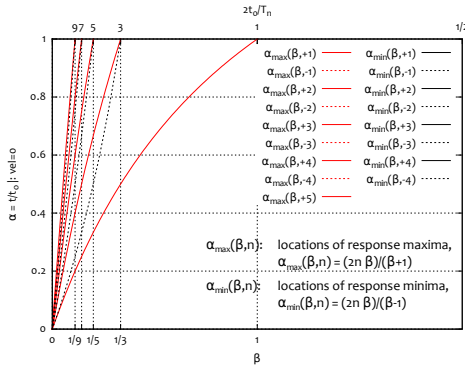

- No roots of type  $\alpha_{\min}$  for  $n > 0$ ;
- no roots of type  $\alpha_{\max}$  for  $n < 0$ ;
- no roots for  $\beta > 1$ , i.e., no roots for  $t_0 < \frac{T_n}{2}$ ;
- only one root of type  $\alpha_{\max}$  for  $\frac{1}{3} < \beta < 1$ , i.e.,  $\frac{T_n}{2} < t_0 < \frac{3T_n}{2}$ ;
- three roots, two maxima and one minimum, for  $\frac{1}{5} < \beta < \frac{1}{3}$ ;
- five roots, three maxima and two minima, for  $\frac{1}{7} < \beta < \frac{1}{5}$ ;
- etc etc.

Response to Impulsive Loading

Introduction  
Response to Half-Sine Wave Impulse  
Response for Rectangular and Triangular Impulses  
Shock or response spectra  
Approximate Analysis of Response Peak

Review

Step-by-step Methods

Examples of Sbs Methods

## Maximum response for $\beta > 1$

SDOF linear oscillator

G. Boffi

For  $\beta > 1$ , the maximum response takes place for  $t > t_0$ , and its absolute value (see slide *Response to sine-wave impulse*) is

$$R_{\max} = \frac{\beta}{1 - \beta^2} \sqrt{(1 + \cos \frac{\pi}{\beta})^2 + \sin^2 \frac{\pi}{\beta}}$$

using a simple trigonometric identity we can write

$$R_{\max} = \frac{\beta}{1 - \beta^2} \sqrt{2 + 2 \cos \frac{\pi}{\beta}}$$

but  $1 + \cos 2\phi = (\cos^2 \phi + \sin^2 \phi) + (\cos^2 \phi - \sin^2 \phi) = 2 \cos^2 \phi$ , so that

$$R_{\max} = \frac{2\beta}{1 - \beta^2} \cos \frac{\pi}{2\beta}$$

Response to Impulsive Loading

Introduction  
Response to Half-Sine Wave Impulse  
Response for Rectangular and Triangular Impulses  
Shock or response spectra  
Approximate Analysis of Response Peak

Review

Step-by-step Methods

Examples of Sbs Methods


## Rectangular Impulse

SDOF linear oscillator

G. Boffi

Consider a rectangular impulse of duration  $t_0$ ,

$$p(t) = p_0 \begin{cases} 1 & \text{for } 0 < t < t_0, \\ 0 & \text{otherwise.} \end{cases}$$



The response ratio and its time derivative are

$$R(t) = 1 - \cos \omega_n t, \quad \dot{R}(t) = \omega_n \sin \omega_n t,$$

and we recognize that we have maxima  $R_{\max} = 2$  for  $\omega_n t = n\pi$ , with the condition  $t \leq t_0$ . Hence we have no maximum during the loading phase for  $t_0 < T_n/2$ , and at least one maximum, of value  $2\Delta_{st}$ , if  $t_0 \geq T_n/2$ .

Response to Impulsive Loading

Introduction  
Response to Half-Sine Wave Impulse  
Response for Rectangular and Triangular Impulses  
Shock or response spectra  
Approximate Analysis of Response Peak

Review

Step-by-step Methods

Examples of Sbs Methods

## Rectangular Impulse (2)

SDOF linear oscillator

G. Boffi

For shorter impulses, the maximum response ratio is not attained during loading, so we have to compute the amplitude of the free vibrations after the end of loading (remember, as  $t_0 \leq T_n/2$  the velocity is positive at  $t = t_0$ !).

$$R(t) = (1 - \cos \omega_n t_0) \cos \omega_n(t - t_0) + (\sin \omega_n t_0) \sin \omega_n(t - t_0).$$

The amplitude of the response ratio is then

$$\begin{aligned} A &= \sqrt{(1 - \cos \omega_n t_0)^2 + \sin^2 \omega_n t_0} = \\ &= \sqrt{2(1 - \cos \omega_n t_0)} = 2 \sin \frac{\omega_n t_0}{2}. \end{aligned}$$

[Response to Impulsive Loading](#)

[Introduction](#)

[Response to Half-Sine Wave Impulse](#)

[Response for Rectangular and Triangular Impulses](#)

[Shock or response spectra](#)

[Approximate Analysis of Response Peak](#)

[Review](#)

[Step-by-step Methods](#)

[Examples of Sbs Methods](#)


## Triangular Impulse

SDOF linear oscillator

G. Boffi

Let's consider the response of a *SDOF* to a triangular impulse,

$$p(t) = p_0 (1 - t/t_0) \text{ for } 0 < t < t_0$$



As usual, we must start finding the minimum duration that gives place to a maximum of the response in the loading phase, that is

$$R(t) = \frac{1}{\omega_n t_0} \sin \omega_n \frac{t}{t_0} - \cos \omega_n \frac{t}{t_0} + 1 - \frac{t}{t_0}, \quad 0 < t < t_0.$$

Taking the first derivative and setting it to zero, one can see that the first maximum occurs for  $t = t_0$  for  $t_0 = 0.37101T_n$ , and substituting one can see that  $R_{\max} = 1$ .

[Response to Impulsive Loading](#)

[Introduction](#)

[Response to Half-Sine Wave Impulse](#)

[Response for Rectangular and Triangular Impulses](#)

[Shock or response spectra](#)

[Approximate Analysis of Response Peak](#)

[Review](#)

[Step-by-step Methods](#)

[Examples of Sbs Methods](#)

## Triangular Impulse (2)

SDOF linear oscillator

G. Boffi

For load durations shorter than  $0.37101T_n$ , the maximum occurs after loading and it's necessary to compute the displacement and velocity at the end of the load phase.

For longer loads, the maxima are in the load phase, so that one has to find the all the roots of  $\dot{R}(t)$ , compute all the extreme values and finally sort out the absolute value maximum.

[Response to Impulsive Loading](#)

[Introduction](#)

[Response to Half-Sine Wave Impulse](#)

[Response for Rectangular and Triangular Impulses](#)

[Shock or response spectra](#)

[Approximate Analysis of Response Peak](#)


[Review](#)

[Step-by-step Methods](#)

[Examples of Sbs Methods](#)

## Shock or response spectra

We have seen that the response ratio is determined by the ratio of the impulse duration to the natural period of the oscillator. One can plot the maximum displacement ratio  $R_{\max}$  as a function of  $t_0/T_n$  for various forms of impulsive loads.

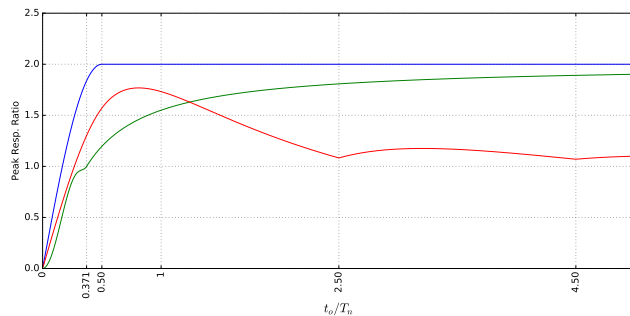

rectangular  
triangular  
half sine

Such plots are commonly known as displacement-response spectra, or simply as response spectra.

SDOF linear oscillator

G. Boffi

Response to Impulsive Loading

Introduction  
Response to Half-Sine Wave Impulse  
Response for Rectangular and Triangular Impulses

Shock or response spectra  
Approximate Analysis of Response Peak

Review

Step-by-step Methods

Examples of Sbs Methods

## Approximate Analysis

For long duration loadings, the maximum response ratio depends on the rate of the increase of the load to its maximum: for a step function we have a maximum response ratio of 2, for a slowly varying load we tend to a quasi-static response, hence a factor  $\approx 1$

On the other hand, for short duration loads, the maximum displacement is in the free vibration phase, and its amplitude depends on the work done on the system by the load.

The response ratio depends further on the maximum value of the load impulse, so we can say that the maximum displacement is a more significant measure of response.

SDOF linear oscillator

G. Boffi

Response to Impulsive Loading

Introduction  
Response to Half-Sine Wave Impulse  
Response for Rectangular and Triangular Impulses  
Shock or response spectra  
Approximate Analysis of Response Peak

Review

Step-by-step Methods

Examples of Sbs Methods

## Approximate Analysis (2)

An approximate procedure to evaluate the maximum displacement for a short impulse loading is based on the impulse-momentum relationship,

$$m\Delta\dot{x} = \int_0^{t_0} [p(t) - kx(t)] dt.$$

When one notes that, for small  $t_0$ , the displacement is of the order of  $t_0^2$  while the velocity is in the order of  $t_0$ , it is apparent that the  $kx$  term may be dropped from the above expression, i.e.,

$$m\Delta\dot{x} \approx \int_0^{t_0} p(t) dt.$$

SDOF linear oscillator

G. Boffi

Response to Impulsive Loading

Introduction  
Response to Half-Sine Wave Impulse  
Response for Rectangular and Triangular Impulses

Shock or response spectra  
Approximate Analysis of Response Peak

Review

Step-by-step Methods

Examples of Sbs Methods

## Approximate Analysis (3)

SDOF linear oscillator

G. Boffi

Using the previous approximation, the velocity at time  $t_0$  is

$$\dot{x}(t_0) = \frac{1}{m} \int_0^{t_0} p(t) dt,$$

and considering again a negligibly small displacement at the end of the loading,  $x(t_0) \cong 0$ , one has

$$x(t - t_0) \cong \frac{\int_0^{t_0} p(t) dt}{m\omega_n} \sin \omega_n(t - t_0).$$

Please note that the above equation is exact for an infinitesimal impulse loading.

Response to Impulsive Loading

Introduction  
Response to Half-Sine Wave Impulse  
Response for Rectangular and Triangular Impulses  
Shock or response spectra  
Approximate Analysis of Response Peak

Review

Step-by-step Methods

Examples of SbS Methods

## Review of Numerical Methods

SDOF linear oscillator

G. Boffi

Response to Impulsive Loading

Review of Numerical Methods

Linear Methods in Time and Frequency Domain

Step-by-step Methods

Examples of SbS Methods

Response to Impulsive Loading

Review

Linear Methods

Step-by-step Methods

Examples of SbS Methods

## Previous Methods

SDOF linear oscillator

G. Boffi

Both the Duhamel integral and the Fourier transform methods lie on the principle of superposition, i.e., superposition of the responses

- ▶ to a succession of infinitesimal impulses, using a convolution (Duhamel) integral, when operating in time domain
- ▶ to an infinity of infinitesimal harmonic components, using the frequency response function, when operating in frequency domain.

The principle of superposition implies *linearity*, but this assumption is often invalid, e.g., **a severe earthquake is expected to induce inelastic deformation in a code-designed structure.**

Response to Impulsive Loading

Review

Linear Methods

Step-by-step Methods

Examples of SbS Methods

## State Vector, Linear and Non Linear Systems

SDOF linear oscillator

G. Boffi

Response to Impulsive Loading

Review

Linear Methods

Step-by-step Methods

Examples of Sbs Methods

The internal state of a linear dynamical system, considering that the mass, the damping and the stiffness do not vary during the excitation, is described in terms of its displacements and its velocity, i.e., the so called *state vector*

$$x = \begin{bmatrix} x(t) \\ \dot{x}(t) \end{bmatrix}.$$

For a non linear system the state vector must include other information, e.g. the current tangent stiffness, the cumulated plastic deformations, the internal damage, ...

## Step-By-Step Methods

SDOF linear oscillator

G. Boffi

Response to Impulsive Loading

Review

Step-by-step Methods

Introduction to Step-by-step Methods

Criticism

Examples of Sbs Methods

Response to Impulsive Loading

Review of Numerical Methods

Step-by-step Methods

Introduction to Step-by-step Methods  
Criticism of Sbs Methods

Examples of Sbs Methods

## Step-by-step Methods

SDOF linear oscillator

G. Boffi

Response to Impulsive Loading

Review

Step-by-step Methods

Introduction to Step-by-step Methods

Criticism

Examples of Sbs Methods

The so-called step-by-step methods restrict the assumption of linearity to the duration of a (usually short) *time step* .

Given an initial system state, in step-by-step methods we divide the time in *steps* of known, short duration  $h_i$  (usually  $h_i = h$ , a constant) and from the initial system state at the beginning of each step we compute the final system state at the end of each step.

The final state vector in step  $i$  will be the initial state in the subsequent step,  $i + 1$ .



## Step-by-step Methods, 2

SDOF linear oscillator

G. Boffi

Response to Impulsive Loading

Review

Step-by-step Methods

Introduction to Step-by-step Methods

Criticism

Examples of Sbs Methods

Operating independently the analysis for each time step there are no requirements for superposition and non linear behaviour can be considered assuming that the structural properties remain constant during each time step.

In many cases, the non linear behaviour can be reasonably approximated by a *local* linear model, valid for the duration of the time step.

If the approximation is not good enough, usually a better approximation can be obtained reducing the time step.

## Advantages of s-b-s methods

SDOF linear oscillator

G. Boffi

Response to Impulsive Loading

Review

Step-by-step Methods

Introduction to Step-by-step Methods

Criticism

Examples of Sbs Methods

**Generality** step-by-step methods can deal with every kind of non-linearity, e.g., variation in mass or damping or variation in geometry and not only with mechanical non-linearities.

**Efficiency** step-by-step methods are very efficient and are usually preferred also for linear systems in place of Duhamel integral.

**Extensibility** step-by-step methods can be easily extended to systems with many degrees of freedom, simply using matrices and vectors in place of scalar quantities.

## Disadvantages of s-b-s methods

SDOF linear oscillator

G. Boffi

Response to Impulsive Loading

Review

Step-by-step Methods

Introduction to Step-by-step Methods

Criticism

Examples of Sbs Methods

The step-by-step methods are approximate numerical methods, that can give only an approximation of true response. The causes of error are

**roundoff** using too few digits in calculations.

**truncation** using too few terms in series expressions of quantities,

**instability** the amplification of errors deriving from roundoff, truncation or modeling in one time step in all following time steps, usually depending on the time step duration.

Errors may be classified as

- ▶ phase shifts or change in frequency of the response,
- ▶ artificial damping, the numerical procedure removes or adds energy to the dynamic system.

<b>Examples Of SbS Methods</b>	SDOF linear oscillator G. Boffi
Response to Impulsive Loading	Response to Impulsive Loading
Review of Numerical Methods	Review
Step-by-step Methods	Step-by-step Methods
<b>Examples of SbS Methods</b>	<b>Examples of SbS Methods</b>
Piecewise Exact Method	Piecewise Exact
Central Differences Method	Central Differences
Methods based on Integration	Integration
Constant Acceleration Method	Constant Acceleration
Linear Acceleration Method	Linear Acceleration
Newmark Beta Methods	Newmark Beta
Specialising for Non Linear Systems	Non Linear Systems
Modified Newton-Raphson Method	Newton-Raphson

<b>Piecewise exact method</b>	SDOF linear oscillator G. Boffi
<ul style="list-style-type: none"> <li>▶ We use the exact solution of the equation of motion for a system excited by a linearly varying force, so the source of all errors lies in the piecewise linearisation of the force function and in the approximation due to a local linear model.</li> <li>▶ We will see that an appropriate time step can be decided in terms of the number of points required to accurately describe either the force or the response function.</li> </ul>	Response to Impulsive Loading Review Step-by-step Methods Examples of SbS Methods Piecewise Exact Central Differences Integration Constant Acceleration Linear Acceleration Newmark Beta Non Linear Systems Newton-Raphson

<b>Piecewise exact method</b>	SDOF linear oscillator G. Boffi
For a generic time step of duration $h$ , consider <ul style="list-style-type: none"> <li>▶ <math>\{x_0, \dot{x}_0\}</math> the initial state vector,</li> <li>▶ <math>p_0</math> and <math>p_1</math>, the values of <math>p(t)</math> at the start and the end of the integration step,</li> <li>▶ the linearised force             <math display="block">p(\tau) = p_0 + \alpha\tau, \quad 0 \leq \tau \leq h, \quad \alpha = (p(h) - p(0))/h,</math> </li> <li>▶ the forced response             <math display="block">x = e^{-\zeta\omega\tau}(A \sin(\omega_D\tau) + B \cos(\omega_D\tau)) + (\alpha k\tau + kp_0 - \alpha c)/k^2,</math>             where <math>k</math> and <math>c</math> are the stiffness and damping of the SDOF system.           </li> </ul>	Response to Impulsive Loading Review Step-by-step Methods Examples of SbS Methods Piecewise Exact Central Differences Integration Constant Acceleration Linear Acceleration Newmark Beta Non Linear Systems Newton-Raphson

## Piecewise exact method

SDOF linear oscillator

G. Boffi

Response to Impulsive Loading

Review

Step-by-step Methods

Examples of Sbs Methods

Piecewise Exact

Central Differences

Integration

Constant Acceleration

Linear Acceleration

Newmark Beta

Non Linear Systems

Newton-Raphson

Evaluating the response  $x$  and the velocity  $\dot{x}$  for  $\tau = 0$  and equating to  $\{x_0, \dot{x}_0\}$ , writing  $\Delta_{st} = p(0)/k$  and  $\delta(\Delta_{st}) = (p(h) - p(0))/k$ , one can find  $A$  and  $B$

$$A = \left( \dot{x}_0 + \zeta\omega B - \frac{\delta(\Delta_{st})}{h} \right) \frac{1}{\omega_D}$$

$$B = x_0 + \frac{2\zeta}{\omega} \frac{\delta(\Delta_{st})}{h} - \Delta_{st}$$

substituting and evaluating for  $\tau = h$  one finds the state vector at the end of the step.

## Piecewise exact method

SDOF linear oscillator

G. Boffi

Response to Impulsive Loading

Review

Step-by-step Methods

Examples of Sbs Methods

Piecewise Exact

Central Differences

Integration

Constant Acceleration

Linear Acceleration

Newmark Beta

Non Linear Systems

Newton-Raphson

With

$$\mathcal{S}_{\zeta,h} = \sin(\omega_D h) \exp(-\zeta\omega h) \text{ and } \mathcal{C}_{\zeta,h} = \cos(\omega_D h) \exp(-\zeta\omega h)$$

and the previous definitions of  $\Delta_{st}$  and  $\delta(\Delta_{st})$ , finally we can write

$$x(h) = A \mathcal{S}_{\zeta,h} + B \mathcal{C}_{\zeta,h} + (\Delta_{st} + \delta(\Delta_{st})) - \frac{2\zeta}{\omega} \frac{\delta(\Delta_{st})}{h}$$

$$\dot{x}(h) = A(\omega_D \mathcal{C}_{\zeta,h} - \zeta\omega \mathcal{S}_{\zeta,h}) - B(\zeta\omega \mathcal{C}_{\zeta,h} + \omega_D \mathcal{S}_{\zeta,h}) + \frac{\delta(\Delta_{st})}{h}$$

where

$$B = x_0 + \frac{2\zeta}{\omega} \frac{\delta(\Delta_{st})}{h} - \Delta_{st}, \quad A = \left( \dot{x}_0 + \zeta\omega B - \frac{\delta(\Delta_{st})}{h} \right) \frac{1}{\omega_D}$$

## Example

SDOF linear oscillator

G. Boffi

Response to Impulsive Loading

Review

Step-by-step Methods

Examples of Sbs Methods

Piecewise Exact

Central Differences

Integration

Constant Acceleration

Linear Acceleration

Newmark Beta

Non Linear Systems

Newton-Raphson

We have a damped system that is excited by a load in resonance with the system, we know the exact response

$$x(t) = \Delta_{st} \left( \frac{\sin \omega_D t}{2\sqrt{1-\zeta^2}} + \frac{\cos \omega_D t}{2\zeta} \right) \exp(-\zeta\omega t) - \frac{\cos \omega_D t}{2\zeta}$$

and we want to compute a step-by-step approximation using different step lengths.


$$m=1000\text{kg},$$

$$k=4\pi^2 1000\text{N/m},$$

$$\omega=2\pi,$$

$$\zeta=0.05,$$

$$p(t) = 4\pi^2 5 \text{ N } \sin(2\pi t)$$

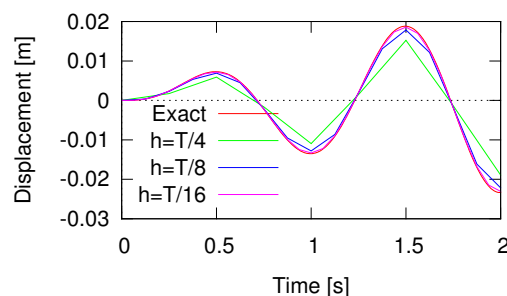

It is apparent that you have a very good approximation when the linearised loading is a very good approximation of the input function, let's say  $h \leq T/10$ .

## Central differences

SDOF linear oscillator

G. Boffi

To derive the Central Differences Method, we write the eq. of motion at time  $\tau = 0$  and find the initial acceleration,

$$m\ddot{x}_0 + c\dot{x}_0 + kx_0 = p_0 \Rightarrow \ddot{x}_0 = \frac{1}{m}(p_0 - c\dot{x}_0 - kx_0)$$

On the other hand, the initial acceleration can be expressed in terms of finite differences,

$$\ddot{x}_0 = \frac{x_1 - 2x_0 + x_{-1}}{h^2} = \frac{1}{m}(p_0 - c\dot{x}_0 - kx_0)$$

solving for  $x_1$

$$x_1 = 2x_0 - x_{-1} + \frac{h^2}{m}(p_0 - c\dot{x}_0 - kx_0)$$

Response to Impulsive Loading

Review

Step-by-step Methods

Examples of Sbs Methods

Piecewise Exact

Central Differences

Integration

Constant Acceleration

Linear Acceleration

Newmark Beta

Non Linear Systems

Newton-Raphson

## Central differences

SDOF linear oscillator

G. Boffi

We have an expression for  $x_1$ , the displacement at the end of the step,

$$x_1 = 2x_0 - x_{-1} + \frac{h^2}{m}(p_0 - c\dot{x}_0 - kx_0),$$

but we have an additional unknown,  $x_{-1}$ ... if we write the finite differences approximation to  $\dot{x}_0$  we can find an approximation to  $x_{-1}$  in terms of the initial velocity  $\dot{x}_0$  and the unknown  $x_1$

$$\dot{x}_0 = \frac{x_1 - x_{-1}}{2h} \Rightarrow x_{-1} = x_1 - 2h\dot{x}_0$$

Substituting in the previous equation

$$x_1 = 2x_0 - x_1 + 2h\dot{x}_0 + \frac{h^2}{m}(p_0 - c\dot{x}_0 - kx_0),$$

and solving for  $x_1$

$$x_1 = x_0 + h\dot{x}_0 + \frac{h^2}{2m}(p_0 - c\dot{x}_0 - kx_0)$$

Response to Impulsive Loading

Review

Step-by-step Methods

Examples of Sbs Methods

Piecewise Exact

Central Differences

Integration

Constant Acceleration

Linear Acceleration

Newmark Beta

Non Linear Systems

Newton-Raphson

## Central differences

SDOF linear oscillator

G. Boffi

$$x_1 = x_0 + h\dot{x}_0 + \frac{h^2}{2m}(p_0 - c\dot{x}_0 - kx_0)$$

To start a new step, we need the value of  $\dot{x}_1$ , but we may approximate the mean velocity, again, by finite differences

$$\frac{\dot{x}_0 + \dot{x}_1}{2} = \frac{x_1 - x_0}{h} \Rightarrow \dot{x}_1 = \frac{2(x_1 - x_0)}{h} - \dot{x}_0$$

The method is very simple, but it is *conditionally stable*. The stability condition is defined with respect to the natural frequency, or the natural period, of the SDOF oscillator,

$$\omega_n h \leq 2 \Rightarrow h \leq \frac{T_n}{\pi} \approx 0.32T_n$$

For a SDOF this is not relevant because, as we have seen in our previous example, we need more points for response cycle to correctly represent the response.

Response to Impulsive Loading

Review

Step-by-step Methods

Examples of Sbs Methods

Piecewise Exact

Central Differences

Integration

Constant Acceleration

Linear Acceleration

Newmark Beta

Non Linear Systems

Newton-Raphson

## Methods based on Integration

We will make use of an *hypothesis* on the variation of the acceleration during the time step and of analytical integration of acceleration and velocity to step forward from the initial to the final condition for each time step.

In general, these methods are based on the two equations

$$\dot{x}_1 = \dot{x}_0 + \int_0^h \ddot{x}(\tau) d\tau,$$
$$x_1 = x_0 + \int_0^h \dot{x}(\tau) d\tau,$$

which express the final velocity and the final displacement in terms of the initial values  $x_0$  and  $\dot{x}_0$  and some definite integrals that depend on the *assumed* variation of the acceleration during the time step.

SDOF linear oscillator

G. Boffi

Response to Impulsive Loading

Review

Step-by-step Methods

Examples of Sbs Methods

Piecewise Exact  
Central Differences

Integration

Constant Acceleration

Linear Acceleration

Newmark Beta

Non Linear Systems

Newton-Raphson

## Integration Methods

Depending on the different assumption we can make on the variation of velocity, different integration methods can be derived.

We will see

- ▶ the constant acceleration method,
- ▶ the linear acceleration method,
- ▶ the family of methods known as *Newmark Beta Methods*, that comprises the previous methods as particular cases.

SDOF linear oscillator

G. Boffi

Response to Impulsive Loading

Review

Step-by-step Methods

Examples of Sbs Methods

Piecewise Exact  
Central Differences

Integration

Constant Acceleration

Linear Acceleration

Newmark Beta

Non Linear Systems

Newton-Raphson

## Constant Acceleration

Here we assume that the acceleration is constant during each time step, equal to the mean value of the initial and final values:

$$\ddot{x}(\tau) = \ddot{x}_0 + \Delta\ddot{x}/2,$$

where  $\Delta\ddot{x} = \ddot{x}_1 - \ddot{x}_0$ , hence

$$\dot{x}_1 = \dot{x}_0 + \int_0^h (\ddot{x}_0 + \Delta\ddot{x}/2) d\tau$$

$$\Rightarrow \Delta\dot{x} = \ddot{x}_0 h + \Delta\ddot{x} h/2$$

$$x_1 = x_0 + \int_0^h (\dot{x}_0 + (\ddot{x}_0 + \Delta\ddot{x}/2)\tau) d\tau$$

$$\Rightarrow \Delta x = \dot{x}_0 h + (\ddot{x}_0) h^2/2 + \Delta\ddot{x} h^2/4$$

SDOF linear oscillator

G. Boffi

Response to Impulsive Loading

Review

Step-by-step Methods

Examples of Sbs Methods

Piecewise Exact  
Central Differences

Integration

Constant Acceleration

Linear Acceleration

Newmark Beta

Non Linear Systems

Newton-Raphson

## Constant acceleration

SDOF linear oscillator

G. Boffi

Taking into account the two equations on the right of the previous slide, and solving for  $\Delta\dot{x}$  and  $\Delta\ddot{x}$  in terms of  $\Delta x$ , we have

$$\Delta\dot{x} = \frac{2\Delta x - 2h\dot{x}_0}{h}, \quad \Delta\ddot{x} = \frac{4\Delta x - 4h\dot{x}_0 - 2\ddot{x}_0 h^2}{h^2}.$$

We have two equations and three unknowns... Assuming that the system characteristics are constant during a single step, we can write the equation of motion at times  $\tau = h$  and  $\tau = 0$ , subtract member by member and write the *incremental equation of motion*

$$m\Delta\ddot{x} + c\Delta\dot{x} + k\Delta x = \Delta p,$$

that is a third equation that relates our unknowns.

Response to Impulsive Loading

Review

Step-by-step Methods

Examples of Sbs Methods

Piecewise Exact

Central Differences

Integration

Constant Acceleration

Linear Acceleration

Newmark Beta

Non Linear Systems

Newton-Raphson

## Constant acceleration

SDOF linear oscillator

G. Boffi

Substituting the above expressions for  $\Delta\dot{x}$  and  $\Delta\ddot{x}$  in the incremental eq. of motion and solving for  $\Delta x$  gives, finally,

$$\Delta x = \frac{\tilde{p}}{\tilde{k}}, \quad \Delta\dot{x} = \frac{2\Delta x - 2h\dot{x}_0}{h}$$

where

$$\tilde{k} = k + \frac{2c}{h} + \frac{4m}{h^2}$$
$$\tilde{p} = \Delta p + 2c\dot{x}_0 + m\left(2\ddot{x}_0 + \frac{4}{h}\dot{x}_0\right)$$

While it is possible to compute the final acceleration in terms of  $\Delta x$ , to achieve a better accuracy it is usually computed solving the equation of equilibrium written at the end of the time step.

Response to Impulsive Loading

Review

Step-by-step Methods

Examples of Sbs Methods

Piecewise Exact

Central Differences

Integration

Constant Acceleration

Linear Acceleration

Newmark Beta

Non Linear Systems

Newton-Raphson

## Constant Acceleration

SDOF linear oscillator

G. Boffi

Two further remarks

1. The method is *unconditionally stable*
2. The effective stiffness, disregarding damping, is  $\tilde{k} \approx k + 4m/h^2$ .

Dividing both members of the above equation by  $k$  it is

$$\frac{\tilde{k}}{k} = 1 + \frac{4}{\omega_n^2 h^2} = 1 + \frac{4}{(2\pi/T_n)^2 h^2} = \frac{T_n^2}{\pi^2 h^2},$$

The number  $n_T$  of time steps in a period  $T_n$  is related to the time step duration,  $n_T = T_n/h$ , solving for  $h$  and substituting in our last equation, we have

$$\frac{\tilde{k}}{k} \approx 1 + \frac{n_T^2}{\pi^2}$$

For, e.g.,  $n_T = 2\pi$  it is  $\tilde{k}/k \approx 1 + 4$ , the mass contribution to the effective stiffness is four times the elastic stiffness and the 80% of the total.

Response to Impulsive Loading

Review

Step-by-step Methods

Examples of Sbs Methods

Piecewise Exact

Central Differences

Integration

Constant Acceleration

Linear Acceleration

Newmark Beta

Non Linear Systems

Newton-Raphson

## Linear Acceleration

SDOF linear oscillator

G. Boffi

We assume that the acceleration is linear, i.e.

$$\ddot{x}(t) = \ddot{x}_0 + \Delta\ddot{x}\frac{\tau}{h}$$

hence

$$\Delta\dot{x} = \ddot{x}_0 h + \Delta\ddot{x}h/2, \quad \Delta x = \dot{x}_0 h + \ddot{x}_0 h^2/2 + \Delta\ddot{x}h^2/6$$

Following a derivation similar to what we have seen in the case of constant acceleration, we can write, again,

$$\Delta x = \left(k + 3\frac{c}{h} + 6\frac{m}{h^2}\right)^{-1} \left[\Delta p + c(\ddot{x}_0 \frac{h}{2} + 3\dot{x}_0) + m(3\ddot{x}_0 + 6\frac{\dot{x}_0}{h})\right]$$

$$\Delta\dot{x} = \Delta x \frac{3}{h} - 3\dot{x}_0 - \ddot{x}_0 \frac{h}{2}$$

Response to Impulsive Loading

Review

Step-by-step Methods

Examples of Sbs Methods

Piecewise Exact

Central Differences

Integration

Constant Acceleration

**Linear Acceleration**

Newmark Beta

Non Linear Systems

Newton-Raphson

## Linear Acceleration

SDOF linear oscillator

G. Boffi

The linear acceleration method is *conditionally stable*, the stability condition being

$$\frac{h}{T} \leq \frac{\sqrt{3}}{\pi} \approx 0.55$$

When dealing with SDOF systems, this condition is never of concern, as we need a shorter step to accurately describe the response of the oscillator, let's say  $h \leq 0.12T$ ..

When stability is not a concern, the accuracy of the linear acceleration method is far superior to the accuracy of the constant acceleration method, so that this is the method of choice for the analysis of SDOF systems.

Response to Impulsive Loading

Review

Step-by-step Methods

Examples of Sbs Methods

Piecewise Exact

Central Differences

Integration

Constant Acceleration

**Linear Acceleration**

Newmark Beta

Non Linear Systems

Newton-Raphson

## Newmark Beta Methods

SDOF linear oscillator

G. Boffi

The constant and linear acceleration methods are just two members of the family of Newmark Beta methods, where we write

$$\Delta\dot{x} = (1 - \gamma)h\ddot{x}_0 + \gamma h\ddot{x}_1$$

$$\Delta x = h\dot{x}_0 + \left(\frac{1}{2} - \beta\right)h^2\ddot{x}_0 + \beta h^2\ddot{x}_1$$

The factor  $\gamma$  weights the influence of the initial and final accelerations on the velocity increment, while  $\beta$  has a similar role with respect to the displacement increment.

Response to Impulsive Loading

Review

Step-by-step Methods

Examples of Sbs Methods

Piecewise Exact

Central Differences

Integration

Constant Acceleration

Linear Acceleration

**Newmark Beta**

Non Linear Systems

Newton-Raphson

## Newmark Beta Methods

SDOF linear oscillator

G. Boffi

Response to Impulsive Loading

Review

Step-by-step Methods

Examples of Sbs Methods

Piecewise Exact

Central Differences

Integration

Constant Acceleration

Linear Acceleration

**Newmark Beta**

Non Linear Systems

Newton-Raphson

Using  $\gamma \neq 1/2$  leads to numerical damping, so when analysing SDOF systems, one uses  $\gamma = 1/2$  (numerical damping may be desirable when dealing with MDOF systems).

Using  $\beta = \frac{1}{4}$  leads to the constant acceleration method, while  $\beta = \frac{1}{6}$  leads to the linear acceleration method. In the context of MDOF analysis, it's worth knowing what is the minimum  $\beta$  that leads to an unconditionally stable behaviour.

## Newmark Beta Methods

SDOF linear oscillator

G. Boffi

Response to Impulsive Loading

Review

Step-by-step Methods

Examples of Sbs Methods

Piecewise Exact

Central Differences

Integration

Constant Acceleration

Linear Acceleration

**Newmark Beta**

Non Linear Systems

Newton-Raphson

The general format for the solution of the incremental equation of motion using the Newmark Beta Method can be written as follows:

$$\Delta x = \frac{\Delta \tilde{p}}{\tilde{k}}$$
$$\Delta v = \frac{\gamma}{\beta} \frac{\Delta x}{h} - \frac{\gamma}{\beta} v_0 + h \left( 1 - \frac{\gamma}{2\beta} \right) a_0$$

with

$$\tilde{k} = k + \frac{\gamma}{\beta} \frac{c}{h} + \frac{1}{\beta} \frac{m}{h^2}$$
$$\Delta \tilde{p} = \Delta p + \left( h \left( \frac{\gamma}{2\beta} - 1 \right) c + \frac{1}{2\beta} m \right) a_0 + \left( \frac{\gamma}{\beta} c + \frac{1}{\beta} \frac{m}{h} \right) v_0$$

## Non Linear Systems

SDOF linear oscillator

G. Boffi

Response to Impulsive Loading

Review

Step-by-step Methods

Examples of Sbs Methods

Piecewise Exact

Central Differences

Integration

Constant Acceleration

Linear Acceleration

**Newmark Beta**

Non Linear Systems

Newton-Raphson

A convenient procedure for integrating the response of a non linear system is based on the incremental formulation of the equation of motion, where for the stiffness and the damping were taken values representative of their variation during the time step: in line of principle, the mean values of stiffness and damping during the time step, or, as this is usually not possible, their initial values,  $k_0$  and  $c_0$ . The Newton-Raphson method can be used to reduce the unbalanced forces at the end of the step.



## Non Linear Systems

SDOF linear oscillator

G. Boffi

Usually we use the modified Newton-Raphson method, characterised by not updating the system stiffness at each iteration. In pseudo-code, referring for example to the Newmark Beta Method

```
x1,v1,f1 = x0,v0,f0 % initialisation; gb=gamma/beta
Dr = DpTilde
loop:
  Dx = Dr/kTilde
  x2 = x1 + Dx
  v2 = gb*Dx/h + (1-gb)*v1 + (1-gb/2)*h*a0
  x_p1 = update_u_p1(...)
  f2 = k*(x2-x_p1)
  % important
  Df = (f2-f1) + (kTilde-k_ini)*Dx
  Dr = Dr - Df
  x1, v1, f1 = x2, v2, f2
  if ( tol(...) < req_tol ) BREAK loop
```

Response to Impulsive Loading

Review

Step-by-step Methods

Examples of Sbs Methods

Piecewise Exact

Central Differences

Integration

Constant Acceleration

Linear Acceleration

Newmark Beta

Non Linear Systems

Newton-Raphson

## Exercise

SDOF linear oscillator

G. Boffi

A system has a mass  $m = 1000\text{kg}$ , a stiffness  $k = 40000\text{N/m}$  and a viscous damping whose ratio to the critical damping is  $\zeta = 0.03$ .

The spring is elastoplastic, with a yielding force of  $2500\text{N}$ .

The load is an half-sine impulse, with duration  $0.3\text{s}$  and maximum value of  $6000\text{N}$ .

Use the constant acceleration method to integrate the response, with  $h = 0.05\text{s}$  and, successively,  $h = 0.02\text{s}$ . Note that the stiffness is either  $0$  or  $k$ , write down the expression for the effective stiffness and loading in the incremental formulation, write a spreadsheet or a program to make the computations.

Response to Impulsive Loading

Review

Step-by-step Methods

Examples of Sbs Methods

Piecewise Exact

Central Differences

Integration

Constant Acceleration

Linear Acceleration

Newmark Beta

Non Linear Systems

Newton-Raphson