

Continuous Systems


an example

Giacomo Boffi

<http://intranet.dica.polimi.it/people/boffi-giacomo>
Dipartimento di Ingegneria Civile Ambientale e Territoriale
Politecnico di Milano

April 21, 2017

Problem statement

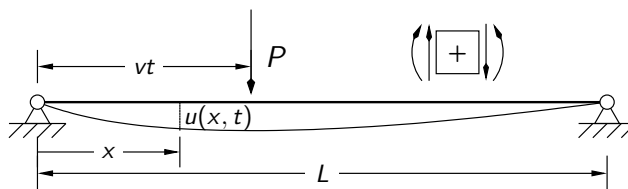

A uniform beam, (unit mass m , flexural stiffness EJ and length L) is loaded by a load P , moving with constant velocity $v(t) = v$ in the time interval $0 \leq t \leq t_0 = L/v = t_0$.

Plot the response in the interval $0 \leq t \leq t_0 = L/v$ in terms of $u(L/2, t)$ and $M_b(L/2, t)$.

NB: the beam is at rest for $t = 0$.

Equation of motion

For a uniform beam, the equation of dynamic equilibrium is

$$m \frac{\partial^2 u(x, t)}{\partial t^2} + EJ \frac{\partial^4 u(x, t)}{\partial x^4} = p(x, t).$$

In our example, the loading function must be defined in terms of $\delta(x)$, the Dirac's delta distribution,

$$p(x, t) = P \delta(x - vt).$$

The Dirac's delta (or distribution) is defined by

$$\delta(x - x_0) \equiv 0 \quad \text{and} \quad \int f(x) \delta(x - x_0) dx = f(x_0).$$

Equation of motion

The solution will be computed by separation of variables

$$u(x, t) = q(t)\phi(x)$$

and modal analysis,

$$u(x, t) = \sum_{n=1}^{\infty} q_n(t)\phi_n(x)$$

The relevant quantities for the modal analysis, obtained solving the eigenvalue problem that arises from the beam boundary conditions are

$$\begin{aligned} \phi_n(x) &= \sin \beta_n x, & \beta_n &= \frac{n\pi}{L}, \\ m_n &= \frac{mL}{2}, & \omega_n^2 &= \beta_n^4 \frac{EJ}{m} = n^4 \pi^4 \frac{EJ}{mL^4}. \end{aligned}$$

Continuous
Systems

Giacomo Boffi

Problem
statement

Solution
Equation of
motion

Orthogonality relationships

For an uniform beam, the orthogonality relationships are

$$\begin{aligned} m \int_0^L \phi_n(x)\phi_m(x) dx &= m_n \delta_{nm}, \\ EJ \int_0^L \phi_n(x)\phi_m^{IV}(x) dx &= k_n \delta_{nm} = m_n \omega_n^2 \delta_{nm}. \end{aligned}$$

(the Kroneker's δ_{nm} is a completely different thing from Dirac's δ , OK?).

Continuous
Systems

Giacomo Boffi

Problem
statement

Solution
Equation of
motion

Decoupling the EOM

Using the orthogonality relationships, we can write an infinity of uncoupled equation of motion for the modal coordinates.

1. The equation of motion is written in terms of the series representation of $u(x, t)$:

$$m \sum_{m=1}^{\infty} \ddot{q}_m \phi_m + EJ \sum_{m=1}^{\infty} q_m \phi_m^{IV} = P \delta(x - vt),$$

2. every term is multiplied by ϕ_n and integrated over the length of the beam

$$\begin{aligned} m \int_0^L \phi_n \sum_{m=1}^{\infty} \ddot{q}_m \phi_m dx + EJ \int_0^L \phi_n \sum_{m=1}^{\infty} q_m \phi_m^{IV} dx = \\ P \int_0^L \phi_n \delta(x - vt), \quad n = 1, \dots, \infty \end{aligned}$$

3. we use the orthogonality relationships and the definition of δ ,

$$m_n \ddot{q}(t) + k_n q(t) = P \phi_n(vt) = P \sin \frac{n\pi vt}{L}, \quad n = 1, \dots, \infty.$$

Continuous
Systems

Giacomo Boffi

Problem
statement

Solution
Equation of
motion

Solutions

Continuous
Systems

Giacomo Boffi

Considering that

- the initial conditions are zero for all the modal equations,
- for each mode we have a *different* excitation frequency
 $\bar{\omega}_n = n\pi v/L$ (and also $\beta_n = \bar{\omega}_n/\omega_n$),

the individual solutions are given by

$$q_n(t) = \frac{P}{k_n} \frac{1}{1 - \beta_n^2} (\sin \bar{\omega}_n t - \beta_n \sin \omega_n t), \quad 0 \leq t \leq \frac{L}{v}$$

and, with $k_n = m_n \omega_n^2 = \frac{mL}{2} n^4 \pi^4 \frac{EJ}{mL^4} = n^4 \pi^4 \frac{EJ}{2L^3}$, it is

$$q_n(t) = \frac{2}{n^4 \pi^4} \frac{PL^3}{EJ} \frac{1}{1 - \beta_n^2} (\sin \bar{\omega}_n t - \beta_n \sin \omega_n t), \quad 0 \leq t \leq \frac{L}{v}.$$

It is apparent that we have *resonance* for $\beta_n = 1$.

Problem
statement

Solution
Equation of
motion

Critical Velocity

Continuous
Systems

Giacomo Boffi

Let's start from $\beta_1 = \pi v/L/\omega_1 = 1$ and solve for the velocity, say v_1

$$v_1 = \omega_1 L/\pi.$$

It is apparent that v_1 is a critical velocity $v_c = v_1 = \omega_1 L/\pi$ that gives a resonance condition for the first mode response, while for $v = 2 v_c$ the second mode is in resonance, etc.

With the position $v = \kappa v_1$ it is

$$\bar{\omega}_n = \kappa n \omega_1 \quad \text{and} \quad \beta_n = n \kappa \omega_1 / n^2 \omega_1 = \kappa/n$$

and we can rewrite the solution as

$$q_n(t) = \frac{2PL^3}{\pi^4 EJ} \frac{1}{n^2(n^2 - \kappa^2)} \left(\sin\left(\frac{\kappa}{n} \omega_n t\right) - \frac{\kappa}{n} \sin \omega_n t \right), \quad 0 \leq t \leq \frac{L}{v}.$$

Problem
statement

Solution
Equation of
motion

Adimensional Time Coordinate

Continuous
Systems

Giacomo Boffi

Introducing an adimensional time coordinate ξ with $t = t_0 \xi$, noting that $\omega_n = n^2 \omega_1$ we can write

$$\frac{\kappa}{n} \omega_n t = \frac{\kappa}{n} n^2 \omega_1 \xi t_0 = \kappa n \left(\frac{v_c \pi}{L} \right) \xi \frac{L}{\kappa v_c} = n \pi \xi,$$

substituting in the solution for mode n we have

$$q_n(\xi) = \frac{2}{\pi^4} \frac{PL^3}{EJ} \frac{1}{n^2(n^2 - \kappa^2)} \left(\sin(n\pi\xi) - \frac{\kappa}{n} \sin\left(\frac{n^2}{\kappa} \pi\xi\right) \right), \quad 0 \leq \xi \leq 1.$$

Problem
statement

Solution
Equation of
motion

Adimensional Time and Adimensional Position

Continuous
Systems

Giacomo Boffi

Problem
statement

Solution

Equation of
motion

If we denote with $\mathbb{X}(t)$ the position of the load at time t , it is $\mathbb{X}(t) = vt = \xi L$, or $\xi = \mathbb{X}/L$ and the expression $u(x, \xi) = \sum q_n(\xi)\phi_n(x)$ can be interpreted as the displacement in x when the load is positioned in ξL .

Displacement and Bending Moment

Continuous
Systems

Giacomo Boffi

Problem
statement

Solution

Equation of
motion

The displacement and the bending moment are given by

$$u(x, \xi) = \frac{2PL^3}{\pi^4 EJ} \sum_{n=1}^{\infty} \frac{1}{n^2(n^2 - \kappa^2)} \left(\sin(n\pi\xi) - \frac{\kappa}{n} \sin\left(\frac{n^2}{\kappa}\pi\xi\right) \right) \sin\left(n\pi\frac{x}{L}\right),$$

$$M_b(x, \xi) = -EJ \frac{\partial^2 u(x, \xi)}{\partial x^2} \\ = \frac{2PL}{\pi^2} \sum_{n=1}^{\infty} \frac{1}{n^2 - \kappa^2} \left(\sin(n\pi\xi) - \frac{\kappa}{n} \sin\left(\frac{n^2}{\kappa}\pi\xi\right) \right) \sin\left(n\pi\frac{x}{L}\right).$$

Normalized Midspan Deflection

Continuous
Systems

Giacomo Boffi

Problem
statement

Solution

Equation of
motion

If we consider the midspan deflection (bending moment) due to a static load P on the beam, the maximum deflection (bending moment) is expected when the load is placed at midspan, and it is

$$u_{\text{stat}}(L/2, 1/2) = \frac{PL^3}{48EJ} \quad \text{and} \quad M_{b \text{ stat}}(L/2, 1/2) = \frac{PL}{4}.$$

Normalizing the midspan displacement with respect to the maximum static displacement, we write

$$\Delta(\xi) = \frac{u}{u_{\text{stat}}} = \frac{96}{\pi^4} \sum_{n=1}^{\infty} \frac{1}{n^2(n^2 - \kappa^2)} \left(\sin(n\pi\xi) - \frac{\kappa}{n} \sin\left(\frac{n^2}{\kappa}\pi\xi\right) \right) \sin\left(n\frac{\pi}{2}\right).$$

Eventually we introduce a notation for the partial sum of the first N terms:

$$\Delta_N(\xi) = \frac{96}{\pi^4} \sum_{n=1}^N \frac{1}{n^2(n^2 - \kappa^2)} \left(\sin(n\pi\xi) - \frac{\kappa}{n} \sin\left(\frac{n^2}{\kappa}\pi\xi\right) \right) \sin\left(n\frac{\pi}{2}\right).$$

Normalized Midspan Bending Moment

Continuous Systems

Giacomo Boffi

Analogously, normalizing with respect to the maximum static bending moment, it is

$$\mu(\xi) = \frac{8}{\pi^2} \sum_{n=1}^{\infty} \frac{1}{n^2 - \kappa^2} \left(\sin(n\pi\xi) - \frac{\kappa}{n} \sin\left(\frac{n^2}{\kappa}\pi\xi\right) \right) \sin\left(n\frac{\pi}{2}\right),$$

the partial sum being denoted by

$$\mu_N(\xi) = \frac{8}{\pi^2} \sum_{n=1}^N \frac{1}{n^2 - \kappa^2} \left(\sin(n\pi\xi) - \frac{\kappa}{n} \sin\left(\frac{n^2}{\kappa}\pi\xi\right) \right) \sin\left(n\frac{\pi}{2}\right).$$

Problem statement

Solution

Equation of motion


Error Estimates

Continuous Systems

Giacomo Boffi

To appreciate the approximation inherent in a truncated series, we compare the truncated series computed for $\kappa = 10^{-6}$ with the static response $\Delta_{\text{stat}}(\xi) = 3\xi - 4\xi^3$ introducing a percent error function

$$\epsilon_{u,N}(\xi) = 100 \left(1 - \frac{\Delta_N(\xi)|_{\kappa=10^{-6}}}{\Delta_{\text{stat}}(\xi)} \right) \quad \text{for } 0 \leq \xi \leq 1/2,$$

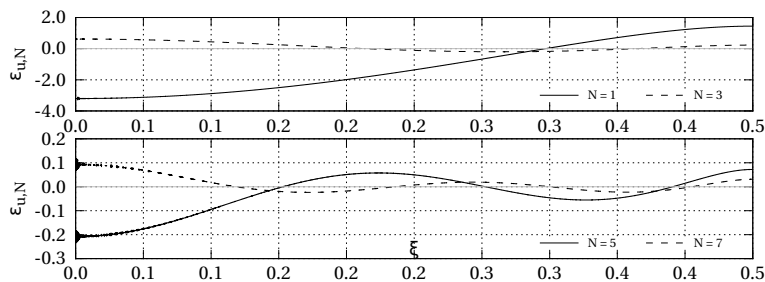

Using 4 terms ($N = 7$) the absolute error is not greater than $1/1000$.

Problem statement

Solution

Equation of motion


Error Estimates

Continuous Systems

Giacomo Boffi

Analogously we can use the midspan bending moment, normalized with respect to $PL/4$, $\mu_{\text{stat}}(\xi) = 2\xi$ to define another percent error function

$$\epsilon_{M,N} = 100 \left(1 - \frac{\mu_N(\xi)|_{\kappa=10^{-6}}}{\mu_{\text{stat}}(\xi)} \right)$$

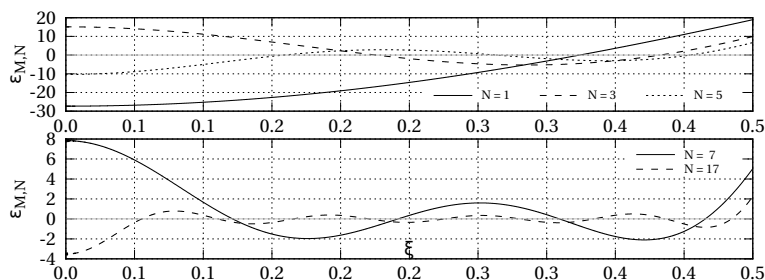

With 8 terms ($N = 17$) terms in the series, still the absolute error is greater than 3%.

Problem statement

Solution

Equation of motion

The Plots

Continuous
Systems

Giacomo Boffi


Problem
statement

Solution

Equation of
motion

Eventually, we plot the normalized displacement and the normalized bending moment for different values of κ , i.e., for different velocities.

For the displacement I used $N = 11$ while for the bending moment I used $N = 25$.

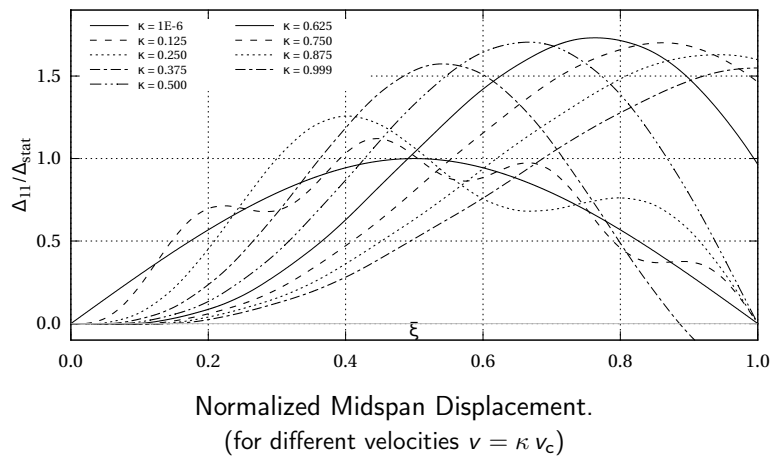


Continuous
Systems

Giacomo Boffi

Problem
statement

Solution

Equation of
motion

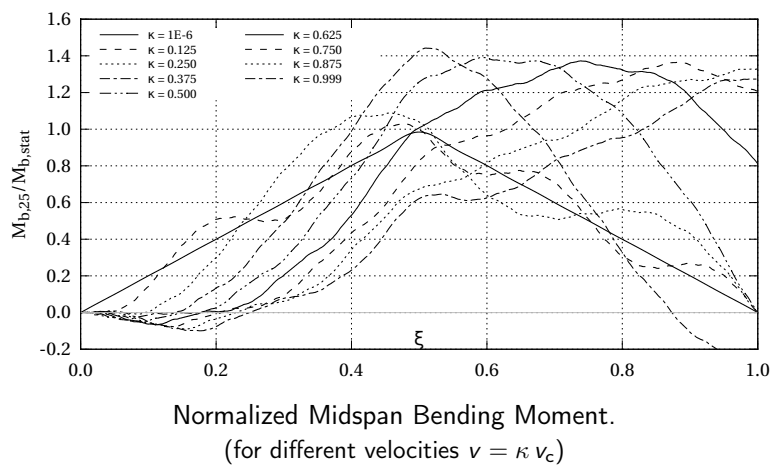

Continuous
Systems

Giacomo Boffi

Problem
statement

Solution

Equation of
motion